


Title : **SQUARE FLANGE**

Issue  
09. nov. 07

Page  
1/2

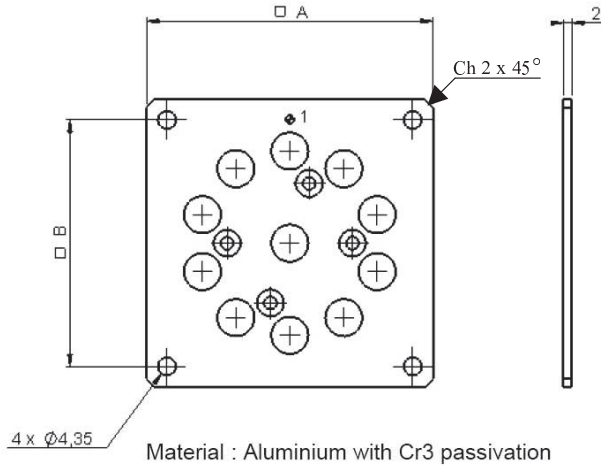

RADIALL Part Number	A (mm)	B (mm)
R599 310 000	63.45	53.45
R599 311 000	63.45	53.45
R599 312 000	63.45	53.45
R599 313 000	69.8	59.8
R599 314 000	74.6	64.6

**For models with connectors SMA, SMA 2.9, QMA**

Model	Type	Options	Number of positions	RADIALL Part Number
R573 series	All	All	3 to 6	R599310000
R574 series	All	All	3 to 6	R599311000
R573 series R574 series	All	All	7 & 8	R599312000
R573 series R574 series	All	All	9 & 10	R599313000
R573 series R574 series	All	All	11 & 12	R599314000

For models with connectors 1.6/5.6, N, BNC, TNC : available only upon request

<b>CREATION</b>				<b>RADIALL</b>	
N°:				101, rue P. Hoffmann	
PEN/EP : CAT				93116 ROSNY/BOIS	
Name: BG				FRANCE	
Date: 09.nov.07				Tel : (33) 0149353535	
Appr.: GP	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363

Title : **SQUARE FLANGE**


Issue  
09. nov. 07

Page  
2/2

**MOUNTING PROCESS**

- 1 ) Assemble the square flange on the RF body of the switch as the following drawing below.
- CAUTION : don't forget to positione correctly the reference mark of port 1**
- 2 ) Screw the four screws (delivered with the square flange)

reference mark of port 1

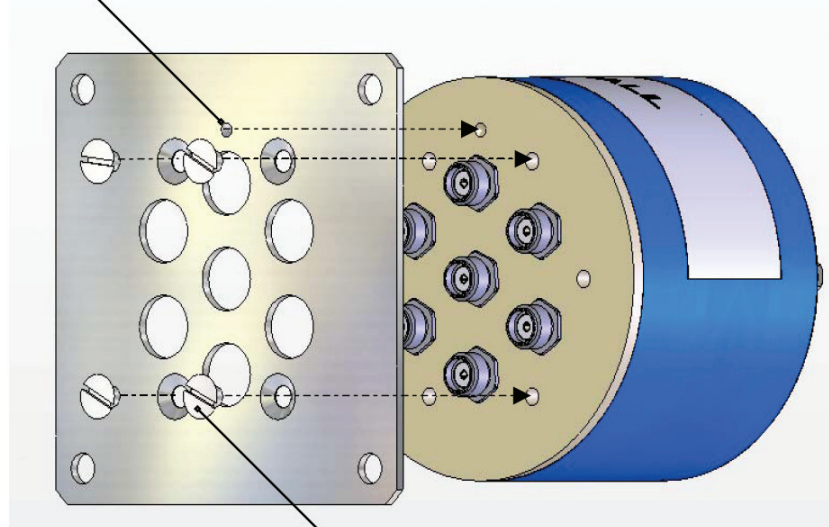

4 screws dia M3 / lenght 3mm

<b>CREATION</b>				<b>RADIALL</b>	
N°:				101, rue P. Hoffmann	
PEN/EP : CAT				93116 ROSNY/BOIS	
Name: BG				FRANCE	
Date: 09.nov.07				Tel : (33) 0149353535	
Appr.: GP	Issue	Revisions	Name	Appr.	Fax : (33) 0148546363