


REV.	DATE	DESCRIPTION
NC	01/04/04	UPDATE DRAWING FORMAT

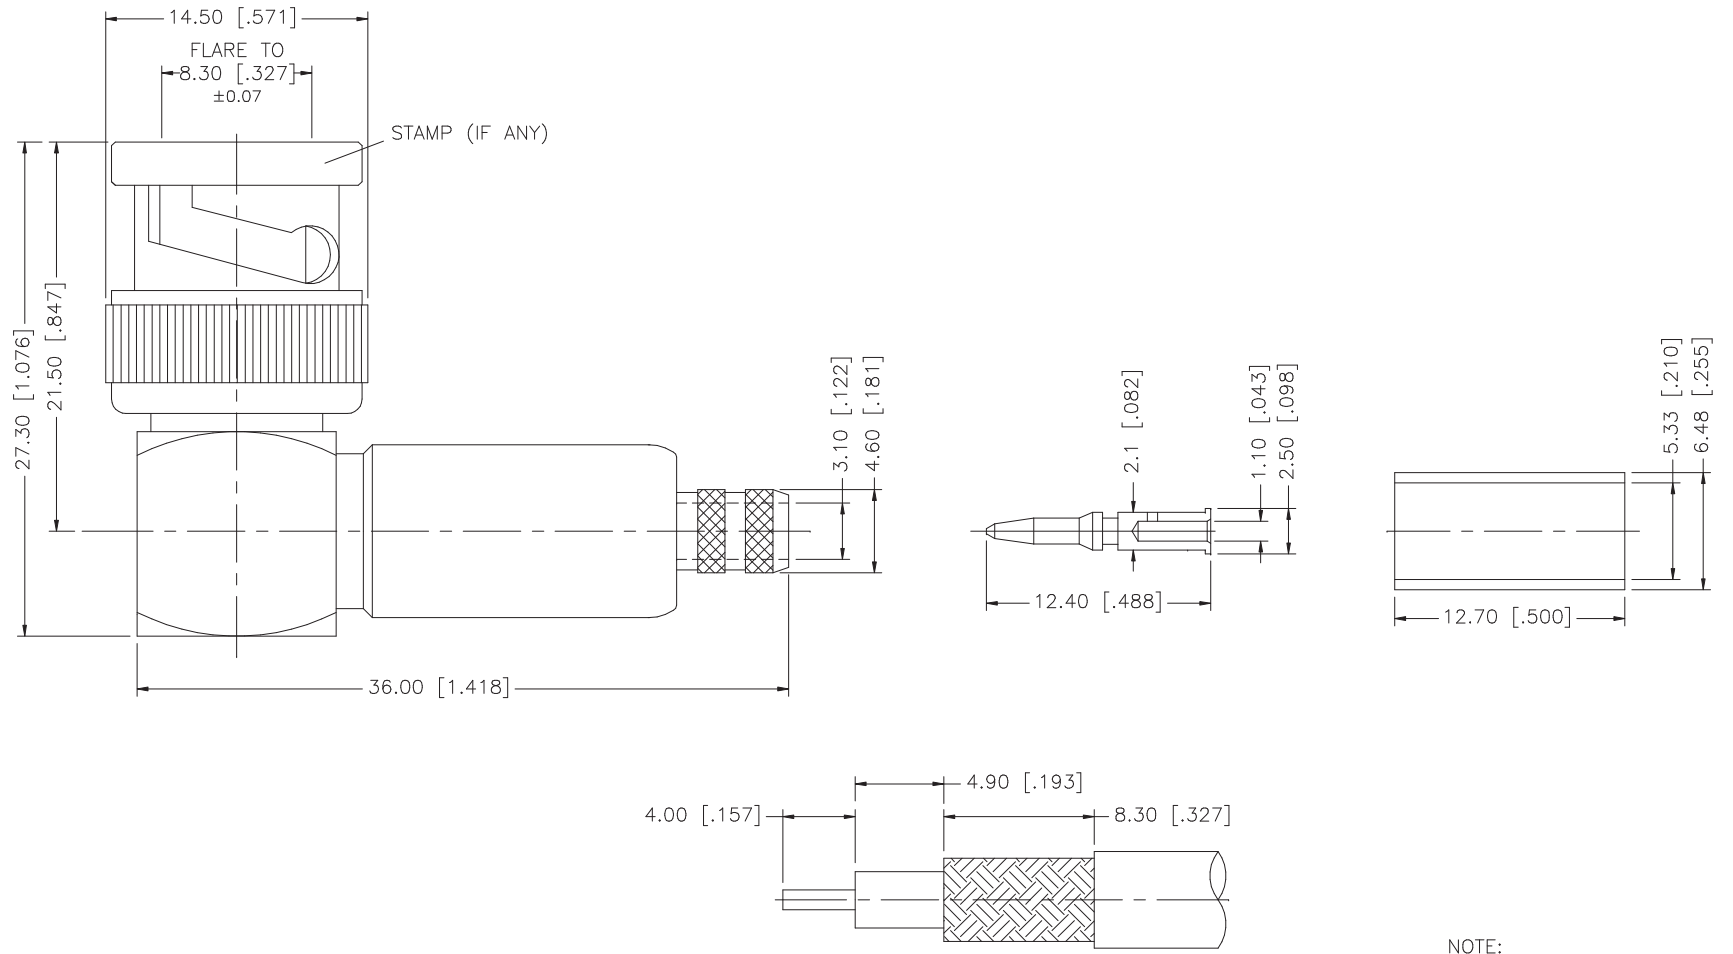

RECOMMENDED  
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
8							PART DESCRIPTION <b>BNC R/A CRIMP PLUG (FOR RG-58/U, 141/U CABLE)</b>					
7						PART NO. <b>112182</b>						
6							DWG. NO. 112182.DWG					
5	FERRULE	COPPER	NICKEL	1			REV.	NC	SIZE	A	SCALE	NA
4	CONTACT PIN	PHOS. BRONZE	GOLD	1			DRAWN G.R.S. 01/04/04					
3	CONTACT PIN	BRASS	GOLD	2			CHECKED					
2	INSULATOR	DELRIN	NATURAL	2			ISSUED					
1	BODY	BRASS	NICKEL	1			SHEET 1 OF 1					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.					CAD FILE C:/112/112182.DWG							
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm												
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"												