


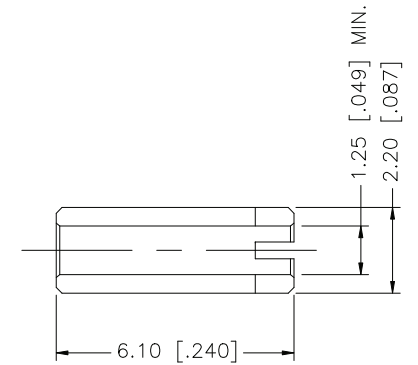



REV.	DATE	DESCRIPTION
NC	05/25/00	INITIAL RELEASE
A	12/11/07	UPDATE DRAWING FORMAT

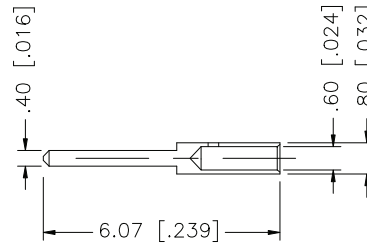

RECOMMENDED CABLE  
STRIPPING DIM'S.

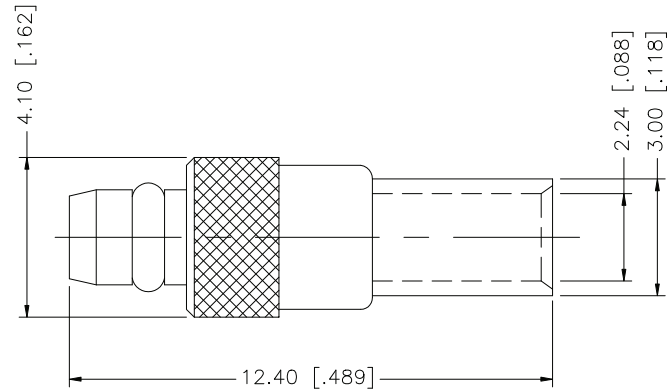

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	<h1 style="text-align: center;">Amphenol Connex</h1>							
8					DRAWN	G.R.S.	12/11/07	<b>MMCX STRAIGHT DIRECT SOLDER PLUG (FOR .047" SEMI-RIGID CABLE)</b>						
7					CHECKED		PART DESCRIPTION							
6	FERRULE	COPPER	GOLD	1	ISSUED		PART NO.							
5	RETAINER RING	BER. COPPER	GOLD	1	SHEET	1 OF 1	262127							
4	BARREL	BRASS	GOLD	1	CAD FILE	C:/262/262127.DWG	DWG. NO.					262127.DWG	REV.	A
3	CONTACT PIN	BRASS	GOLD	1	<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small>				<small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm</small>					
2	INSULATOR	TEFLON	NATURAL	1	<small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"</small>									
1	BODY	BRASS	GOLD	1										