REV.	DATE	DESCRIPTION
A	11/06/04	MODIFY BODY/CONTACT PIN/FERRULE DIMS

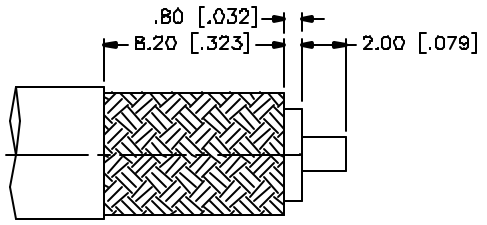

RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
MOUNTING HOLE



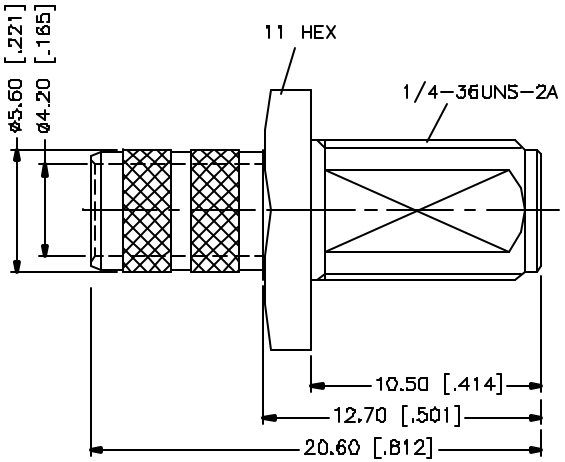

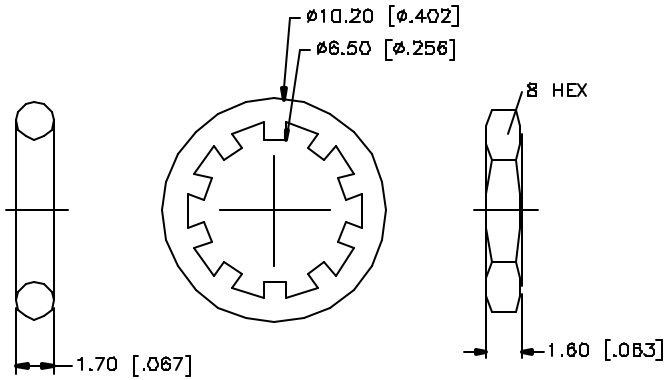

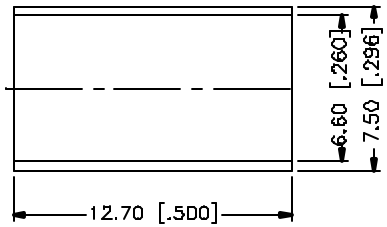

NOTE:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

8				
7	FERRULE	COPPER	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	11/06/04
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/132/132283.DWG

Amphenol Connex

PART DESCRIPTION
SMA BULKHEAD CRIMP JACK
(FOR RG-8/X, LMR240)

PART NO. 132283

DWG. NO.	REV.	SIZE	SCALE
132283.DWG	A	A	NA