NOTES:
1. MATERIALS AND FINISHES:
   BODY - BRASS, SILVER PLATING
   CONTACT - BERYLLIUM COPPER, GOLD PLATING
   INSULATOR - PTFE

2. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65° C TO + 165° C

3. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL RF, 31-4452 AND DATE CODE"

4 SHOWS CABLE ENTRY DIMENSONS.

31-4452	REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	--	RELEASE TO MFG.	------	------	------
	U	REDRAWN IN PRO-E, ADD COD	5/23/11	47687	KR
	V	REDRWAN, ADD COD	1/14/13	48616	CM
	W	DIA 0.125 WAS 0.0125	8-AUG-13	49665	KR

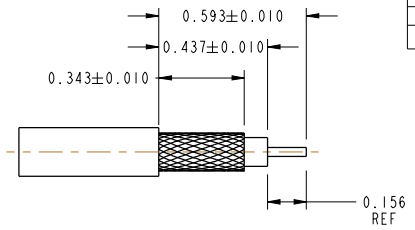

RECOMMENDED CABLE STRIPPING DIMENSIONS



SCALE 2.000

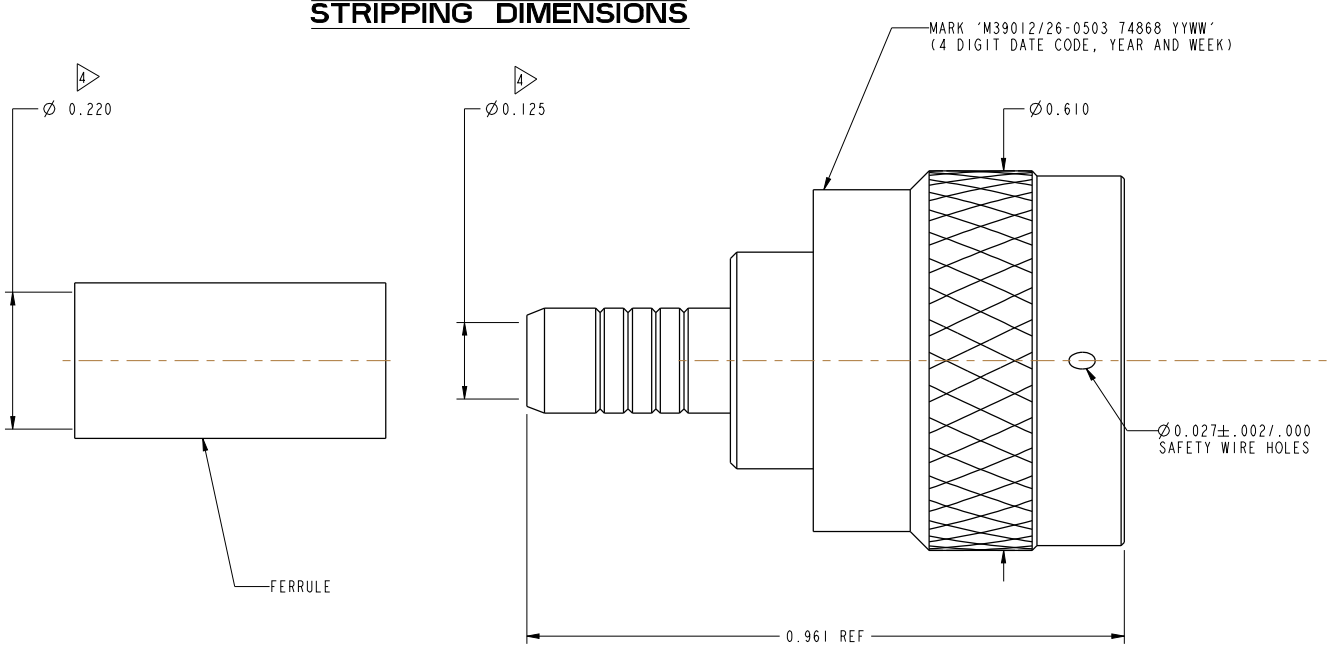

MIL-C-39012 INSPECTION

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL ±.015 (0,381 mm) | 3 PLACE DECIMAL ±.005 (0,127 mm) | ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

DRAWN	KARTHIK R	DATE 09-Jul-09
ENGINEER	H. HUTTER	DATE 7/9/75
APPROVED	H.G.H	DATE 7/15/75
CAD FILE		

TITLE
TNC PLUG
MIL- CRIMP FOR
RG142B/U & 400/U CABLE

Amphenol
Amphenol Corporation
Communication and Network
Products Division
Danbury, CT U.S.A. 06810

SCALE: 5.0:1 | SHEET 2 OF 2

CODE ID	DWG SIZE	DRAWING NO.	REV
74868	B	31-4452	W