DATE REVISED: 9/21/04

CATALOG NUMBER
A055-A11-05

MATERIAL AND FINISH

FLOAT MOUNT, SPRING RING, AND BUSHING:	CRES 303; PASSIVATED
CENTER CONTACT, LOAD HOUSING, GPO HOUSING, END CAP, AND SNAP RING:	BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.
SPRING:	STAINLESS STEEL ASTM 313; PASSIVATED
DIELECTRICS:	VIRGIN PTFE



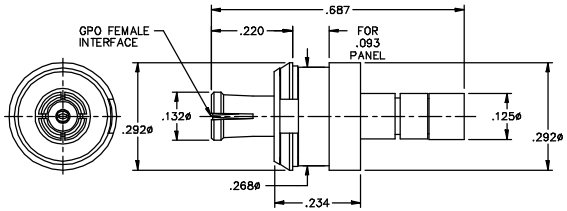

EXTRACTION TOOL – A098-A99-05.

RECOMMENDED MOUNTING HOLE



This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPO FEMALE LOAD SNAP-IN FLOAT MOUNT	IDENT CODE: 82316 REVISION: B	Corning Gilbert Inc.

SOURCE FILE: SK-2353	DWG. NO.: OL-A055-A11-05	ASSY. PROC.: –