



MICROWAVE PRODUCTS DIVISION
HI-PERFORMANCE MICROWAVE CONNECTORS

ACCOUNT LOG-IN

Log-in

[Create Account](#) | [Forgot Password](#)

[HOME](#) | [ABOUT US](#) | [PRODUCTS](#) | [PRODUCT FINDER](#) | [NEWS & EVENTS](#) | [RESOURCE CENTER](#) | [CONTACT](#)


FOLLOW US

Launch Pin/Tab Transitions to Stripline

290-27G

d Dia.: 0.020"
 D Dia.: 0.064"
 T: 0.050"
 Th: 0.004"
 L₁: 0.160"
 L₂: 0.125"

Launch Pin/Tab and Dielectric Transition to Stripline

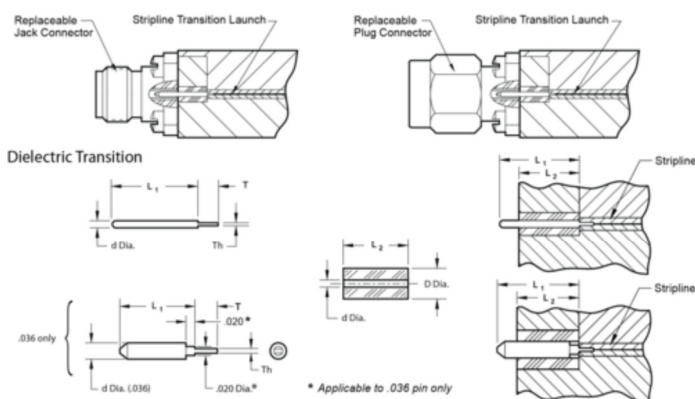

Materials/Construction:

- Launch Pin: BeCu Per ASTM B196
- Plating: Gold Over Nickel Per MIL-G-45204
- Dielectric: Virgin PTFE Fluorocarbon Per ASTM D1710

ADD TO PROJECT

Please login at the top of the page to add products to your projects.

PRODUCTS



[PRODUCT FINDER](#)

- » Super SMA Connectors
- » N Connectors
- » TNC Connectors
- » SSMA Connectors
- » 2.92 mm Connectors
- » 2.40 mm Connectors
- » 1.85 mm Connectors
- » End Launch Connectors
- » Adapters
- » Cable Connectors
- » Launch Accessories
- » Installation and Tools
- » SSBP
- » Beyond the Catalog (PDF)
- » Catalog Appendix (PDF)

[Mailing List](#) | [Employment](#) | [Legal Statement](#) | [U.S Export Compliance](#) | [Order Information](#) | [Security Systems Division](#)
 ©2012 Southwest Microwave, Inc. All Rights Reserved.

