



MICROWAVE PRODUCTS DIVISION  
**HI-PERFORMANCE MICROWAVE CONNECTORS**

ACCOUNT LOG-IN

Log-in

[Create Account](#) | [Forgot Password](#)

[HOME](#) | [ABOUT US](#) | [PRODUCTS](#) | [PRODUCT FINDER](#) | [NEWS & EVENTS](#) | [RESOURCE CENTER](#) | [CONTACT](#)


FOLLOW US

## Launch Pin Transitions to Microstrip

290-36G

d Dia.: 0.036"  
 D Dia.: 0.117"  
 T: 0.050"  
 p Dia.: 0.010"  
 L<sub>1</sub>: 0.237"  
 L<sub>2</sub>: 0.187"

Launch Pin and Dielectric Transition to Microstrip

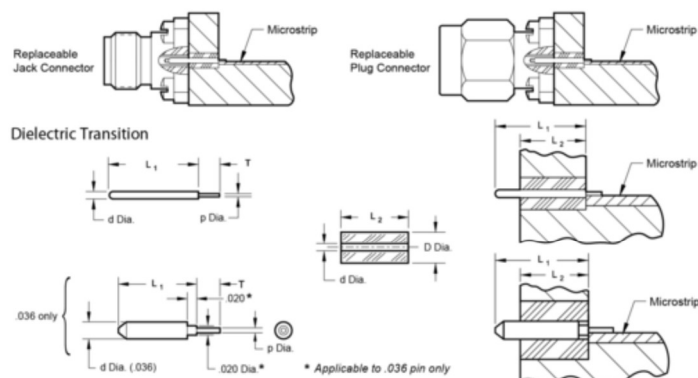

**Materials/Construction:**

- Launch Pin: BeCu Per ASTM B196
- Plating: Gold Over Nickel Per MIL-G-45204
- Dielectric: Virgin PTFE Fluorocarbon Per ASTM D1710

**ADD TO PROJECT**

Please login at the top of the page to add products to your projects.

## PRODUCTS



[PRODUCT FINDER](#)

- » Super SMA Connectors
- » N Connectors
- » TNC Connectors
- » SSMA Connectors
- » 2.92 mm Connectors
- » 2.40 mm Connectors
- » 1.85 mm Connectors
- » End Launch Connectors
- » Adapters
- » Cable Connectors
- » Launch Accessories
- » Installation and Tools
- » SSBP
- » Beyond the Catalog (PDF)
- » Catalog Appendix (PDF)

[Mailing List](#) | [Employment](#) | [Legal Statement](#) | [U.S Export Compliance](#) | [Order Information](#) | [Security Systems Division](#)  
 ©2012 Southwest Microwave, Inc. All Rights Reserved.

