


REVISION			
ASS. CON. REV.	DESCRIPTION	DATE	APPROVED
N/A	INITIAL RELEASE	2015/01/07	

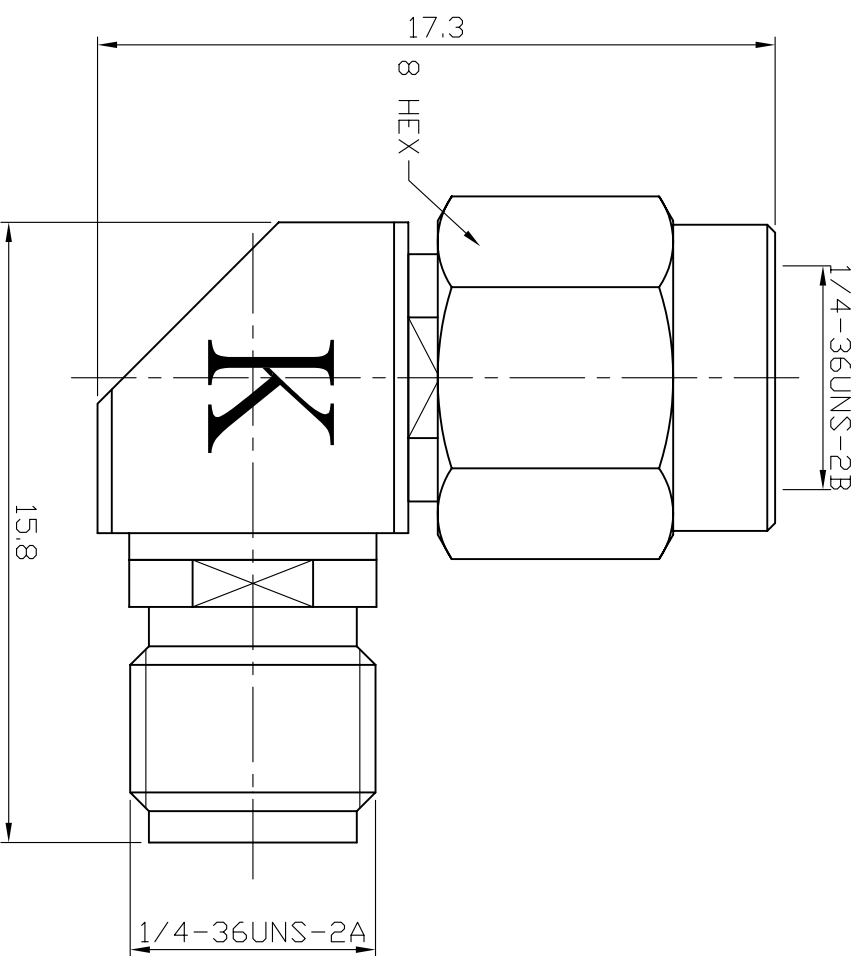

VSWR : 1.25 UP TO 40GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. STAINLESS STEEL.
2. BERYLLIUM COPPER.
3. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.
4. TIN-ZINC-COPPER-ALLOY PL. 100 MIN. OVER COPPER PL. 50 MIN.

10	RETAINER RING	NOTE 2	NOTE 4	1	SMA3100-5/W
9	GASKET	SILICONE		1	SMA3100-4
8	FERRULE	NOTE 1	PASSIVATED	2	ALS-K3K8-8
7	FERRULE	NOTE 1	PASSIVATED	2	ALS-K3K8-7
6	CONTACT PIN	NOTE 2	NOTE 3	1	ALS-K3K8-6/NM
5	INSULATOR	PPO		2	K3300-0085-3
4	BODY	NOTE 1	PASSIVATED	1	ALS-K3K8-4
3	BODY	NOTE 1	PASSIVATED	1	ALS-K3K8-3
2	BODY	NOTE 1	PASSIVATED	1	ALS-K3K8-2
1	SHELL	NOTE 1	PASSIVATED	1	SMA31NP-1
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.

DIMENSION ARE MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES (UNIT: MM)

0.5~5 = ±0.05  
5~10 = ±0.07  
10~20 = ±0.10  
20~30 = ±0.15  
30~ = ±0.20

SCALE	ASSEMBLY REV.	CONNECTOR REV.	UNIT
5 / 1	N/A	-	MM
APPROVED			
CHECKED	DATE		
DRAWING	DATE		

**JYE BAO CO., LTD.**  
TAIPEI TAIWAN

TITLE  
K PLUG TO K JACK R/A  
DRAWING NO.  
ALS-K3K8