


REVISION

ASS. REV.	CON. REV.	DESCRIPTON	DATE	APPROVED
N/A	-	INITIAL RELEASE	2015/01/07	

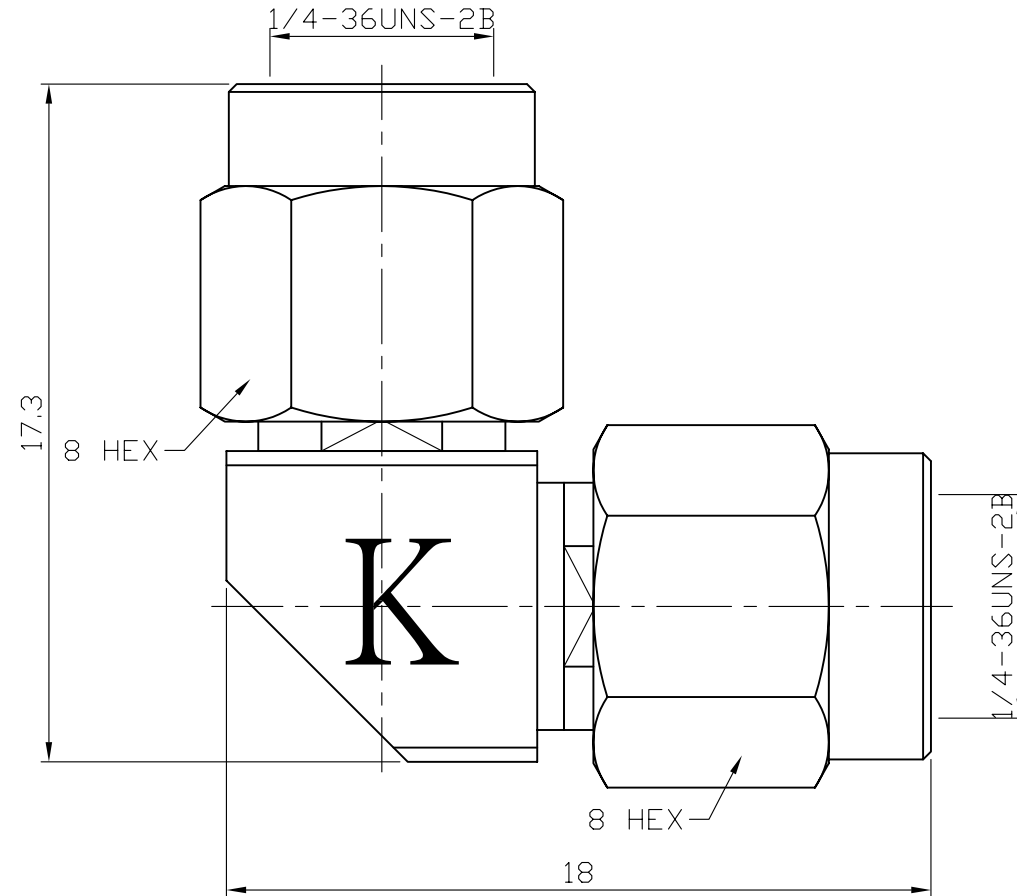

VSWR : 1.25 UP TO 40GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. STAINLESS STEEL.
2. BERYLLIUM COPPER.
3. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY  
PL. 80 MIN. OVER COPPER PL. 20 MIN.
4. TIN-ZINC-COPPER-ALLOY PL. 100 MIN.  
OVER COPPER PL. 50 MIN.

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.
9	FERRULE	NOTE 1	PASSIVATED	2	ALS-K3K8-8
8	RETAINER RING	NOTE 2	NOTE 4	2	SMA3100-5/W
7	GASKET	SILICONE		2	SMA3100-4
6	FERRULE	NOTE 1	PASSIVATED	2	ALS-K3K8-7
5	CONTACT PIN	NOTE 2	NOTE 3	1	ALS-K3K3-5/NM
4	INSULATOR	PPO		2	K3300-0085-3
3	BODY	NOTE 1	PASSIVATED	1	ALS-K3K8-3
2	BODY	NOTE 1	PASSIVATED	2	ALS-K3K8-2
1	SHELL	NOTE 1	PASSIVATED	2	SMA31NP-1

DIMENSION ARE MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES ( UNIT: MM )

- 0.5~ 5= ±0.05
- 5 ~10 = ±0.07
- 10~20 = ±0.10
- 20~30 = ±0.15
- 30~ = ±0.20

SCALE	ASSEMBLY REV.	CONNECTOR REV.	UNIT
5 / 1	N/A	-	MM
APPROVED			
CHECKED			
DRAWING			
DATE	DATE	DATE	DATE

**JYE BAO CO., LTD.**

TAIPEI TAIWAN

TITLE  
K PLUG TO K PLUG R/A

DRAWING NO.  
ALS-K3K3