


# SPECIFICATIONS

FREQUENCY RANGE (GHz): DC - 7.5 GHz  
 IMPEDANCE (NOMINAL): 50 Ohms  
 TEMPERATURE RANGE: -65°C TO +85°C  
 VSWR: Hz - 1.0 1.05:1  
 1.0 - 4.0 1.15:1  
 5.0 - 7.5 1.25:1  
 PIM: < -160 dBc

MFG CODE	DESCRIPTION
/M	N-MALE TO DIN-FEMALE ADAPTER

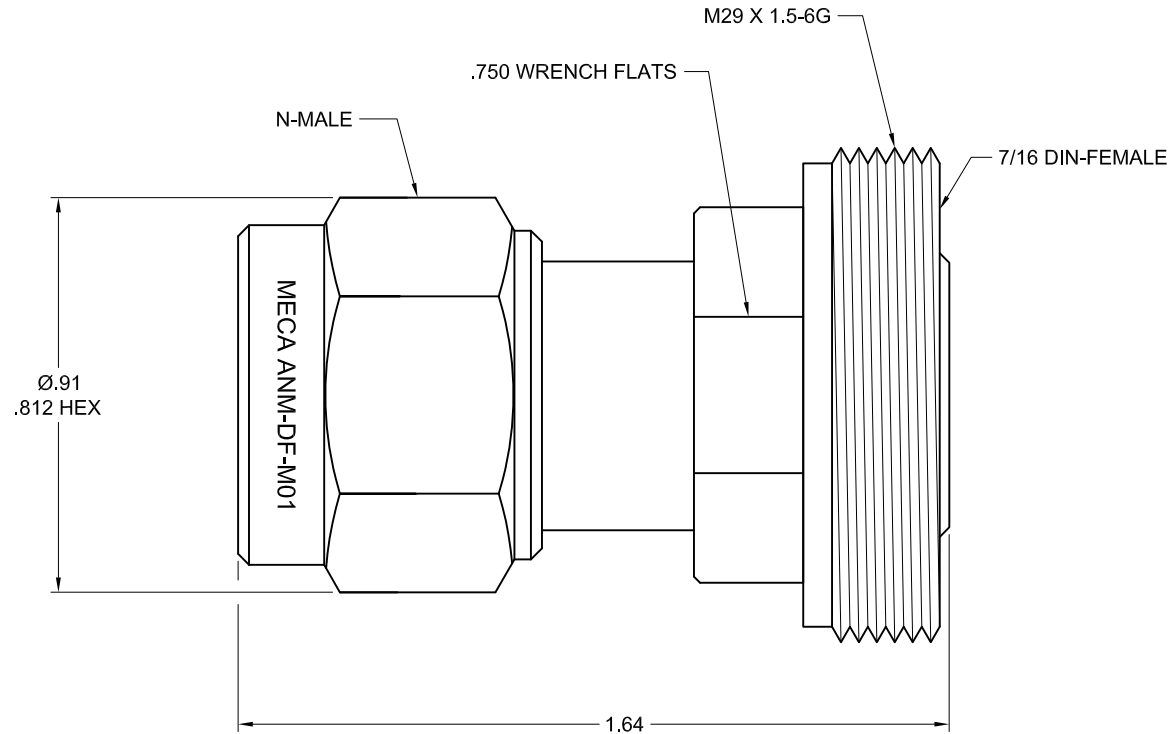

BODY: BRASS, ALBALOY PLATED  
 CENTER CONTACT: BeCu, SILVER PLATED

A	PG	DESCRIPTION	DATE	DR	APP	NEXT LEVEL ASSY.
		NEW	02/03/12	M.O.C.	RR	VARIOUS

MATERIAL: SEE ABOVE		TOP LEVEL ASSY: VARIOUS	
FINISH: SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES	
		TOLERANCES N/A	
DRAWN: M.O.C.	DATE: 02/03/12	TIR: N/A	
APPROVED: RR	DATE: 06/19/12	SCALE: NTS	SIZE A
		SHEET: 1 OF 1	



**ELECTRONICS, INC.**  
 DENVER, NEW JERSEY  
 e-MECA.com

TITLE  
 ADAPTER, N-MALE  
 TO DIN-FEMALE

CAGE CODE NO. 22424	DRAWING NO. ANM-DF-M01	REV A
------------------------	---------------------------	----------