



# SPECIFICATIONS

FREQUENCY RANGE (GHz): DC - 8 GHz  
 IMPEDANCE (NOMINAL): 50 Ohms  
 TEMPERATURE RANGE: -65°C TO +85°C  
 VSWR: Hz - 1.0 1.05:1  
 1.0 - 4.0 1.15:1  
 4.0 - 8.0 1.25:1  
 PIM: < -160 dBc

MFG CODE	DESCRIPTION
/M	N-MALE TO DIN-MALE ADAPTER

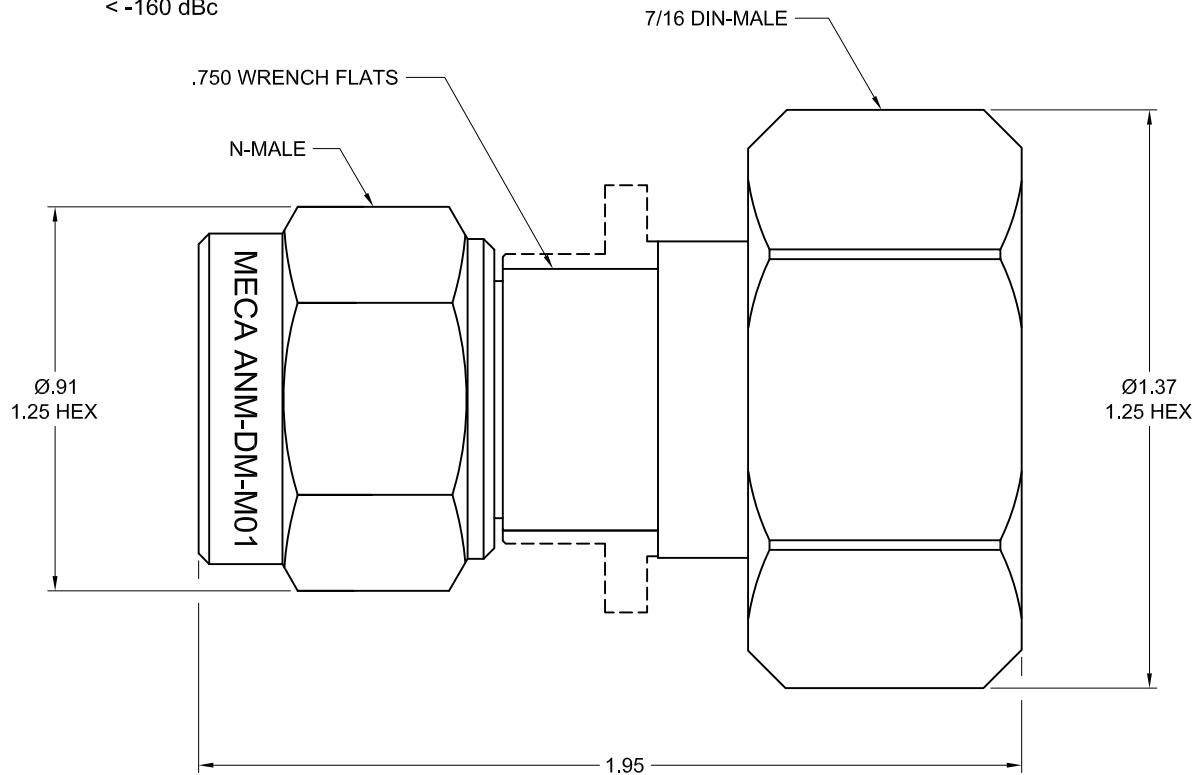

BODY: BRASS, ALBALOY PLATED  
 CENTER CONTACT: BRASS, SILVER PLATED

							<b>MATERIAL:</b> SEE ABOVE		<b>TOP LEVEL ASSY:</b> VARIOUS		 <b>ELECTRONICS, INC.</b> DENVER, NEW JERSEY e-MECA.com		
							<b>FINISH:</b> SEE ABOVE		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES				
									TOLERANCES N/A		<b>TITLE</b> ADAPTER, N-MALE TO DIN-MALE		
			<b>DRAWN:</b> M.O.C.	<b>DATE:</b> 02/03/12	<b>TIR:</b> N/A		<b>SIZE</b> A		<b>CAGE CODE NO.</b> 22424	<b>DRAWING NO.</b> ANM-DM-M01			<b>REV</b> A
<b>A</b>		NEW	02/03/12	M.O.C.	RR	VARIOUS							
<b>LTR</b>	<b>PG</b>	<b>DESCRIPTION</b>	<b>DATE</b>	<b>DR</b>	<b>APP</b>	<b>NEXT LEVEL ASSY.</b>	<b>APPROVED:</b> RR	<b>DATE:</b> 06/19/12	SCALE: NTS	SHEET: 1 OF 1	<b>22424</b>	<b>A</b>	