

NOTES:

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION & MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.

A.) ELECTRICAL SPECS;

- 1.) IMPEDANCE / 50 OHMS.
- 2.) VOLTAGE RATING / 500 VRMS (CONTINUOUS)
- 3.) DIELECTRIC WITHSTANDING VOLTAGE / 1500 VRMS.
- 4.) INSULATION RESISTANCE / 5,000 MEGOHMS MIN.
- 5.) FREQUENCY RANGE / DC TO 4 GHz.
- 6.) PRACTICAL FREQUENCY LIMIT / 10 GHz.


B.) TEMPERATURE RANGE / -65° TO +165°C

C.) MATERIAL;

- 1.) BODY, OUTER CONTACT, WASHER & SLEEVE / BRASS,COMP.22,1/2HD,QQ-B-626.
- 2.) CONTACT / BERYLLIUM COPPER PER QQ-C-530.
- 3.) SPRING / BERYLLIUM COPPER PER QQ-C-530.
- 4.) GASKET / SILICONE PER ZZ-R-765.

D.) FINISH;

- 1.) SPRING / NICKEL PLATED.
- 2.) ALL OTHER METAL PARTS / GOLD PLATED.

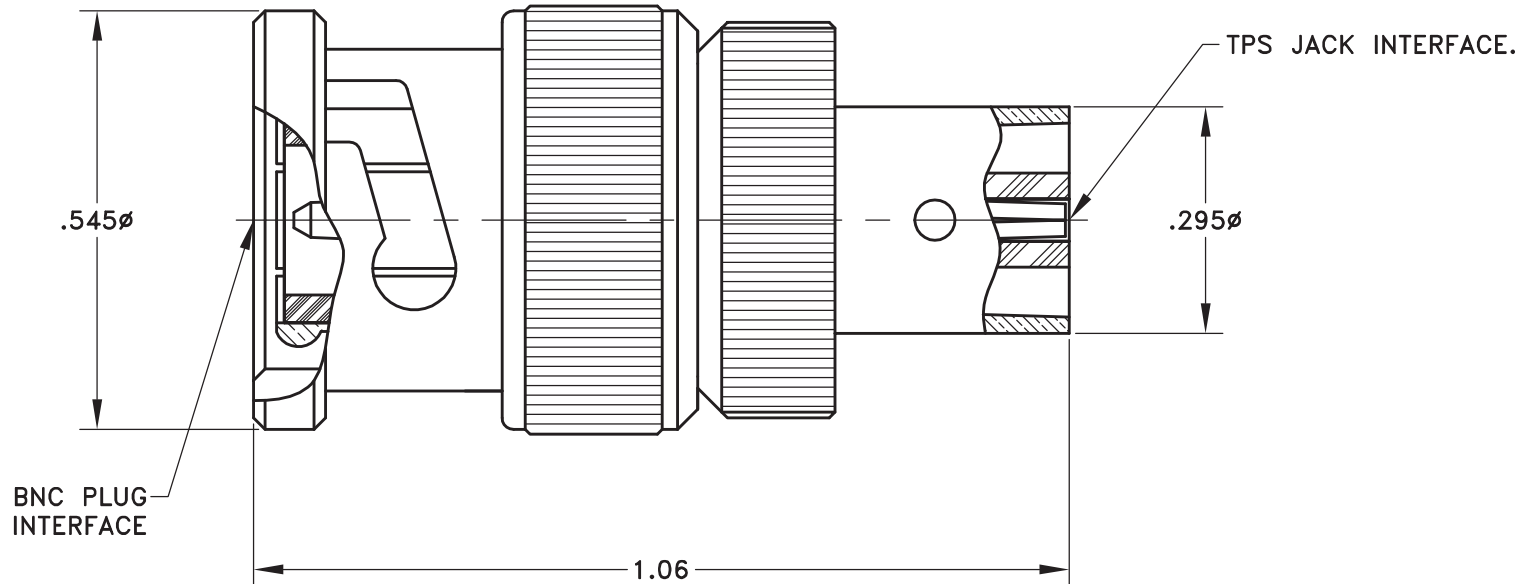

REVISIONS  
REV LEVEL  
-C-

<b>CONNECTRONICS, INC.</b> EDINBURGH, INDIANA		FSCM 43608
DWG BY: RLC	DATE: 8/4/10	TOLERANCES UNLESS OTHERWISE SPECIFIED
APVD BY:	SCALE: _____	
MATERIAL: _____		2 PL DEC ±.020
FINISH: _____		3 PL DEC ±.005
DESCRIPTION: BETWEEN SERIES BNC PLUG TO TPS JACK		ANG. DIM ±1/2°
		DRAWING NO. <b>70-195</b> SHT 1 OF 1