




Search: in **Web Site**

- About Us
- Products
- minibend
- mini 141
- microbend
- Contact Us
- Online Catalog
- Search
- Request Catalog
- Your Cart

hermetic SMA jack - SMA jack, bulkhead - 29285G

[Catalog Home](#) -> [Adaptors In-Series](#) -> [SMA Adaptors In-Series](#) -> hermetic SMA jack - SMA jack, bulkhead - 29285G

**hermetic SMA jack - SMA jack, bulkhead
29285G**

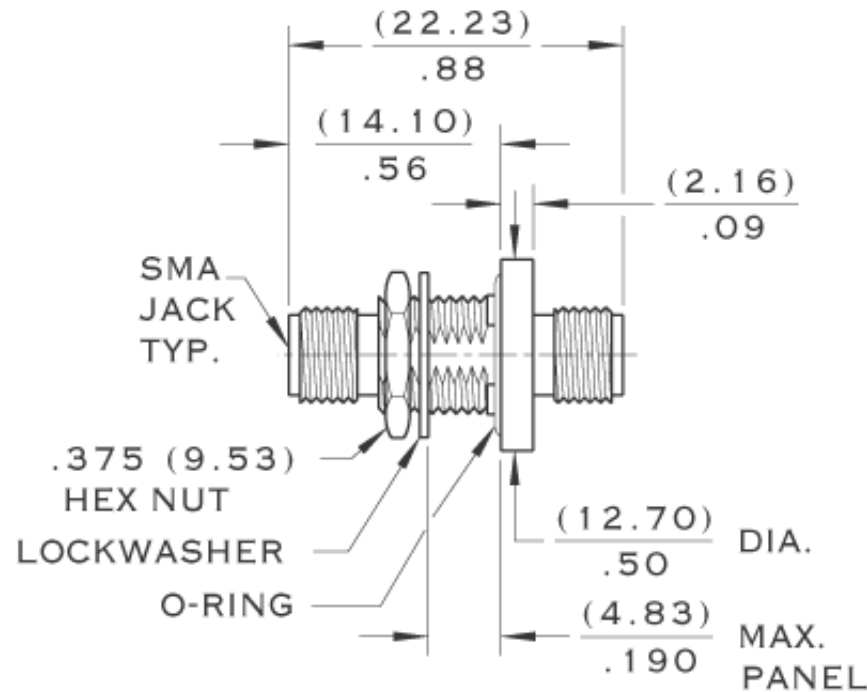

- frequency 22 GHz max.
- VSWR 1.30:1 max. at 10.0 GHz
- VSWR 1.45:1 max. at 22.0 GHz
- I.L. 0.55 dB max.

- figure [PC4 panel cut out](#)

Add this item to my cart.

Enter Quantity:

Add to Cart

[Click here](#) to view your cart.

Browse By Category

[Catalog Home](#)
[Microwave Cable Assemblies](#)
[Microwave Cable](#)
[Microwave Connectors](#)
[Contacts](#)

[Adaptors Between Series](#)
[Surge Protection Adaptors](#)
[Phase Shifters](#)
[Other Passive Components](#)

Tel: (732) 560-3800

Fax: (732) 560-9570

[Privacy Policy](#)

[Terms and Conditions](#)

[Email Support](#)