


***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	08/07/08	MJK	MJK

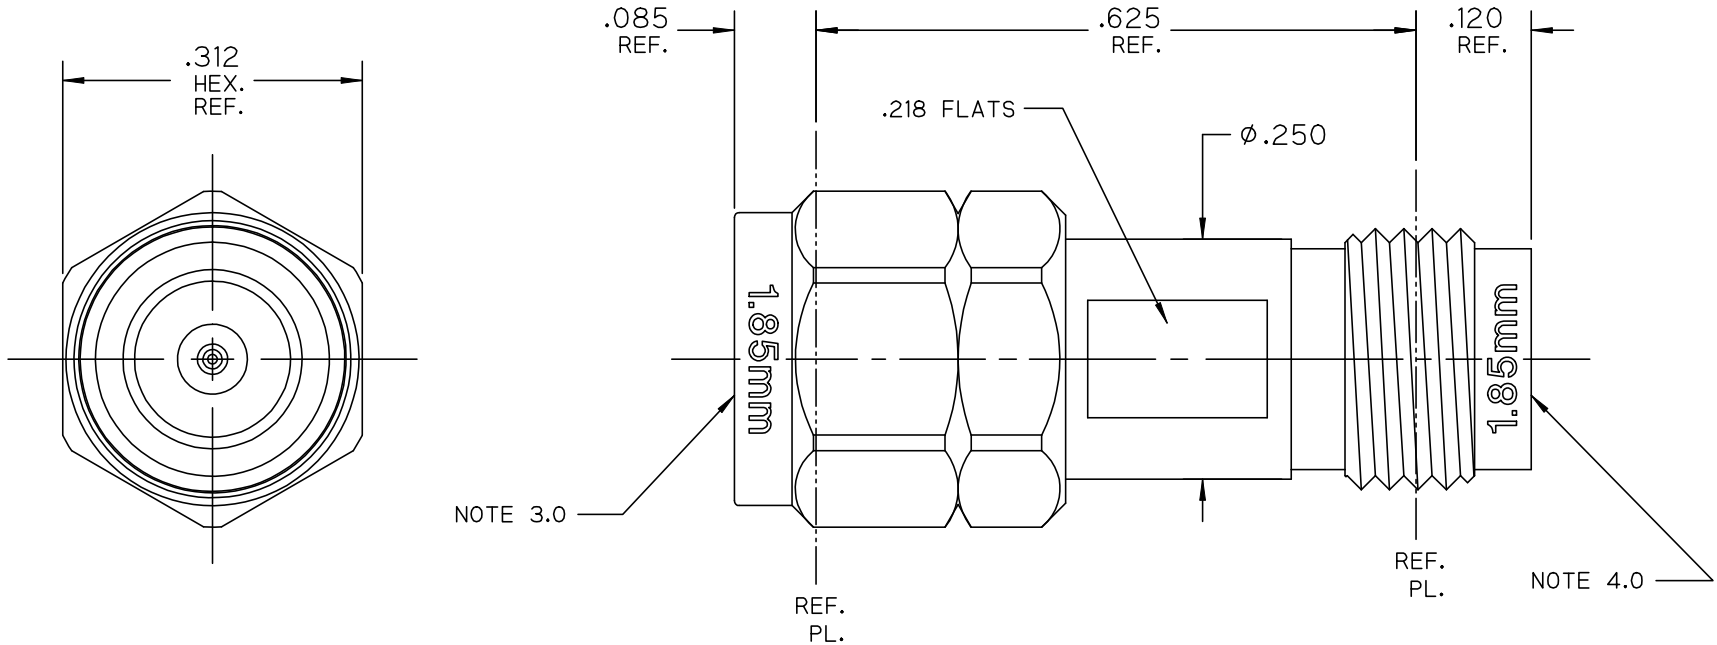

NOTES :

1.0 MATERIALS:

- 1.1 BODY, & COUPLING NUT: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.2 CENTER COND.: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.3 LOCK RING: BERYLLIUM COPPER PER ASTM-B197, UNS C17200.
- 1.4 GASKET: SILICONE RUBBER PER A-A-59588.
- 1.5 DIELECTRIC BEAD: POLYETHERIMIDE THERMOPLASTIC (ULTEM 1000) PER ASTM-D5205.

2.0 FINISHES:

- 2.1 CENTER CONTACT: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.
- 2.2 BODY & COUPLING NUT: PASSIVATE PER SAE-AMS-2700.
- 2.3 GASKET, LOCK RING & DIELECTRIC BEAD: NONE.
- 3.0 1.85mm PIN INTERFACE PER PCI-1.85mm-PIN.
- 4.0 1.85mm SOCKET INTERFACE PER PCI-1.85mm-SOC.



TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY: MJK	PART DESCRIPTION:			
.XX ± .02	DATE: 08/07/08	ADAPTER, 1.85mm PLUG TO 1.85mm JACK			
.XXX ± .005	CAGE CODE	SCALE	SHEET NO.	DRAWING NUMBER	REV
.XXXX ± .0005	4MJR5	5:1	1 OF 1	2204-0L	A
ANGLES ± 2°					