


REVISION			
ASS. CON. REV.	DESCRIPTION	DATE	APPROVED
N/A	INITIAL RELEASE	2015/01/30	

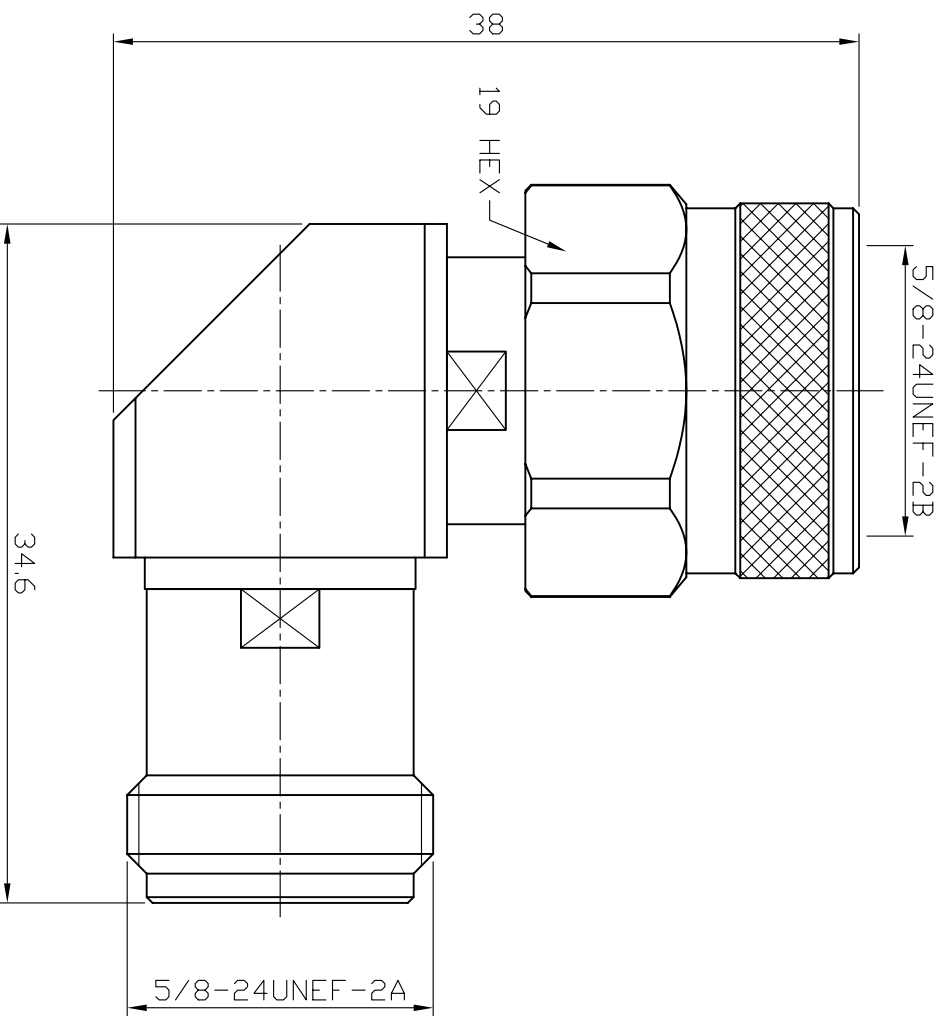

MAX VSWR 1.2:1 UP TO 18GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. STAINLESS STEEL.
2. BERYLLIUM COPPER.
3. BRASS.
4. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.
5. TIN-ZINC-COPPER-ALLOY PL. 100 MIN. OVER COPPER PL. 50 MIN.

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.
8	RETAINER RING	NOTE 3	NOTE 5	1	N3100-6/W
7	GASKET	SILICONE		1	N3100-5
6	CONTACT PIN	NOTE 2	NOTE 4	1	ALS-N3N8-18-6/NM
5	INSULATOR	TEFLON		2	N8503-3
4	BODY	NOTE 1	PASSIVATED	1	ALS-N3N8-18-4
3	BODY	NOTE 1	PASSIVATED	1	ALS-N3N8-18-3
2	BODY	NOTE 1	PASSIVATED	1	ALS-N3N8-18-2
1	SHELL	NOTE 1	PASSIVATED	1	N3200S-1

DIMENSION ARE MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES (UNIT: MM)

0.5~5 = ±0.05
5~10 = ±0.07
10~20 = ±0.10
20~30 = ±0.15
30~ = ±0.20

SCALE	ASSEMBLY REV.	CONNECTOR REV.	UNIT	TITLE
2.5 / 1	N/A	T	MM	N PLUG TO N JACK RIGHT ANGLE
APPROVED			DATE	DRAWING NO.
CHECKED			DATE	ALS-N3N8-18
DRAWING			DATE	

JYE BAO CO., LTD.
TAIPEI TAIWAN