- 5. VSWR NOT TO EXCEED 1.3:1 THRU 26 GHz
- 4. ADAPTOR TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-39012
- 3. FINISH:

BODY:


GOLD PER MIL-G-45204: TYPE II, CLASS 1, OVER NICKEL (ELECTRONESS) PER MIL-C-26074, CLASS 1 CONTACT: GOLD PER MIL-G-45204: TYPE II, CLASS 2, OVER COPPER PER MIL-C-14550, CLASS 4 RECOMMENDED FINISH: PART MAY BE PURCHASED WITH PASSIVATED STAINLESS STEEL PER QQ-P-35 BY ADDING SF TO THE PART NUMBER i.e. 355-CC-SF-26

2. MATERIAL:

BODY: STAINLESS STL PER QQ-S-763 TYPE 303 CONTACT: BERYL. COPPER PER QQ-C-530 INSULATOR: TEFLON PER MIL-P-19468A

1. MATING DIMS IN ACCORDANCE WITH MIL-STD-348

NOTES:

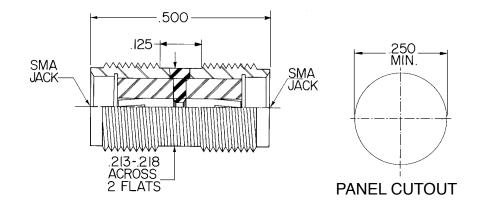

This drawing embodies a CONFIDENTIAL proprietary design originated by United Microwave Products, Inc., and all design, manufacturing, reproduction, use and sale rights regarding the same are expressly reserved. It is submitted under a confidential relationship for a specified purpose and the recipient agrees by accepting this drawing not to supply or disclose any information regarding it to any unauthorized person or to incorporate in other projects any special feature peculiar to this design. All patent rights hereto are expressly reserved by United Microwave Products Inc.

NOTICE

N/A NONE

TOLERANCES AND NOTES EXCEPT AS NOTED DIMENSIONS ARE IN INCHES

LINEAR XX ± .015 ANGULAR ± 1/2 ° FRACTION ± 1/32 XXX ± .005

1. MACHINE FINISH 637 RMS

- 2 . BREAK ALL SHARP EDGES .002
- 3. ALL MACHINED FILLLETS
 4. ALL MACHINED SURFACESS SQUARE TO
- RESPETIVE AXIS WITHIN .003 PER INCH. 5. MACHINED DIAMETERS TO BE .
- CONCENTRIC WITHIN .002 .003 T.I.R.
 6. DIMENSIONS TO BE MET BEFORE PLATING.
- DIMENSIONS TO BE MET BEFORE PLAT
 CHAMPER ALL THDS .45 DEGREES
 THREADS PER H-2B
- REMOVE FRAYED EDGES ON TEFLON.
 REMOVE ALL BURRS.

		MATERIAL	SIZE	SPECIFICATION		PROCUREMENT	
				APPR.			
					ENG.		
					CHK.		
UNITED MICROWAVE PRODUCTS Inc.					DR.		
ONTIED WHOTIOWAVE I HODOUTO IIIC.					355-CC-26		
SMA JACK TO SMA JACK ADAPTER 26GHz							