

47-921-0000-00


Materials: SST, corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530  
PTFE Fluorocarbon per ASTM-D-1710 Type 1, Oxide-Noryl (tm), MIL-P-46129


Finish: Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.  
Body and Body components shall be passivated per ASTM A380.

Frequency: DC-18 GHz

VSWR: 1.15 TO 18 GHz

Insertion Loss: .05 SQT(F(GHz)) dB

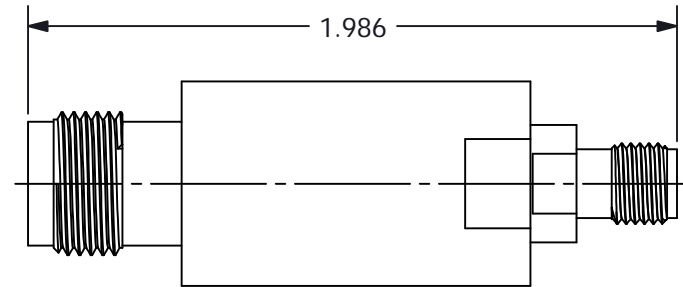

LTR	DESCRIPTION	DATE	APPR.	DRAWN <b>LMW</b>	CHECKED	USED ON <b>47-921-0000-00</b>	 SRI CONNECTOR GAGE COMPANY 751 NORTH DRIVE MELBOURNE FLORIDA 32934	
-	REL	02/04		APPR.	SCALE	MATERIAL	TITLE: <b>TNC JACK TO SMA JACK</b>	
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32 UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.		FINISH		
				DIMENSIONS ARE IN INCHES TOLERANCES		SIZE <b>A</b>	FSCM NO. <b>OHM01</b>	SHEET <b>1</b>
				DECIMALS X ±.030 XX ±.010 XXX ±.005	FRACTIONAL ± 1/64	ANGULAR .X° ±1°0 .X'X ±15'	DWG. NO. <b>47-921-0000-00</b>	