

46-921-0000-00


Materials: SST, corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530 PTFE Fluorocarbon per ASTM-D-1710 Type 1, Oxide-Noryl (tm), MIL-P-46129


Finish: Center Conductors and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290. Body and Body components shall be passivated per ASTM A380.

Frequency: DC-18 GHz

VSWR: 1.15 TO 18 GHz

Insertion Loss: .05 SQT(F(GHz)) dB

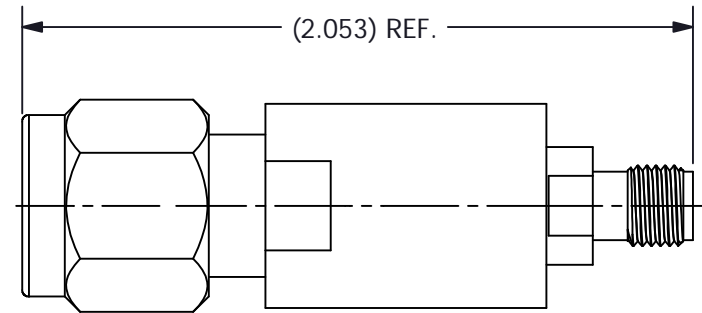

LTR	DESCRIPTION	DATE	APPR.	DRAWN LMW	CHECKED	USED ON	 SRI CONNECTOR GAGE COMPANY 751 NORTH DRIVE MELBOURNE FLORIDA 32934		
-	REL	02/04		APPR.	SCALE	46-921-0000-00	TITLE:		
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32 UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.		MATERIAL	TNC PLUG TO SMA JACK		
				DIMENSIONS ARE IN INCHES TOLERANCES		FINISH			
				DECIMALS X ±.030 XX ±.010 XXX ±.005	FRACTIONAL ± 1/64	ANGULAR .X° ±1°0 .X'X ±15'	SIZE	FSCM NO.	
						A	OHM01	SHEET	DWG. NO.
						1	46-921-0000-00		