

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION & MAY NOT BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT WRITTEN CONSENT FROM CONNECTRONICS, INC.


DASH #	BODY MATERIAL	BODY FINISH	CONTACT FINISH
-1	STAINLESS STEEL	PASSIVATE	GOLD
-2	STAINLESS STEEL	GOLD	GOLD
-3	BRASS	GOLD	GOLD

NOTES:

A.) ELECTRICAL SPECS:

- 1.) VOLTAGE RATING/500 VRMS
- 2.) IMPEDANCE/50 OHMS
- 3.) FREQUENCY RANGE/0 TO 18 GHz.
- 4.) DIELECTRIC WITHSTANDING VOLTAGE/1,500VRMS
- 5.) INSULATION RESISTANCE/5,000 MEGOHMS MIN.
- 6.) MAX VSWR/ 1.05 + .005fGHz

B.) TEMPERATURE RANGE/-65° TO +165° C.

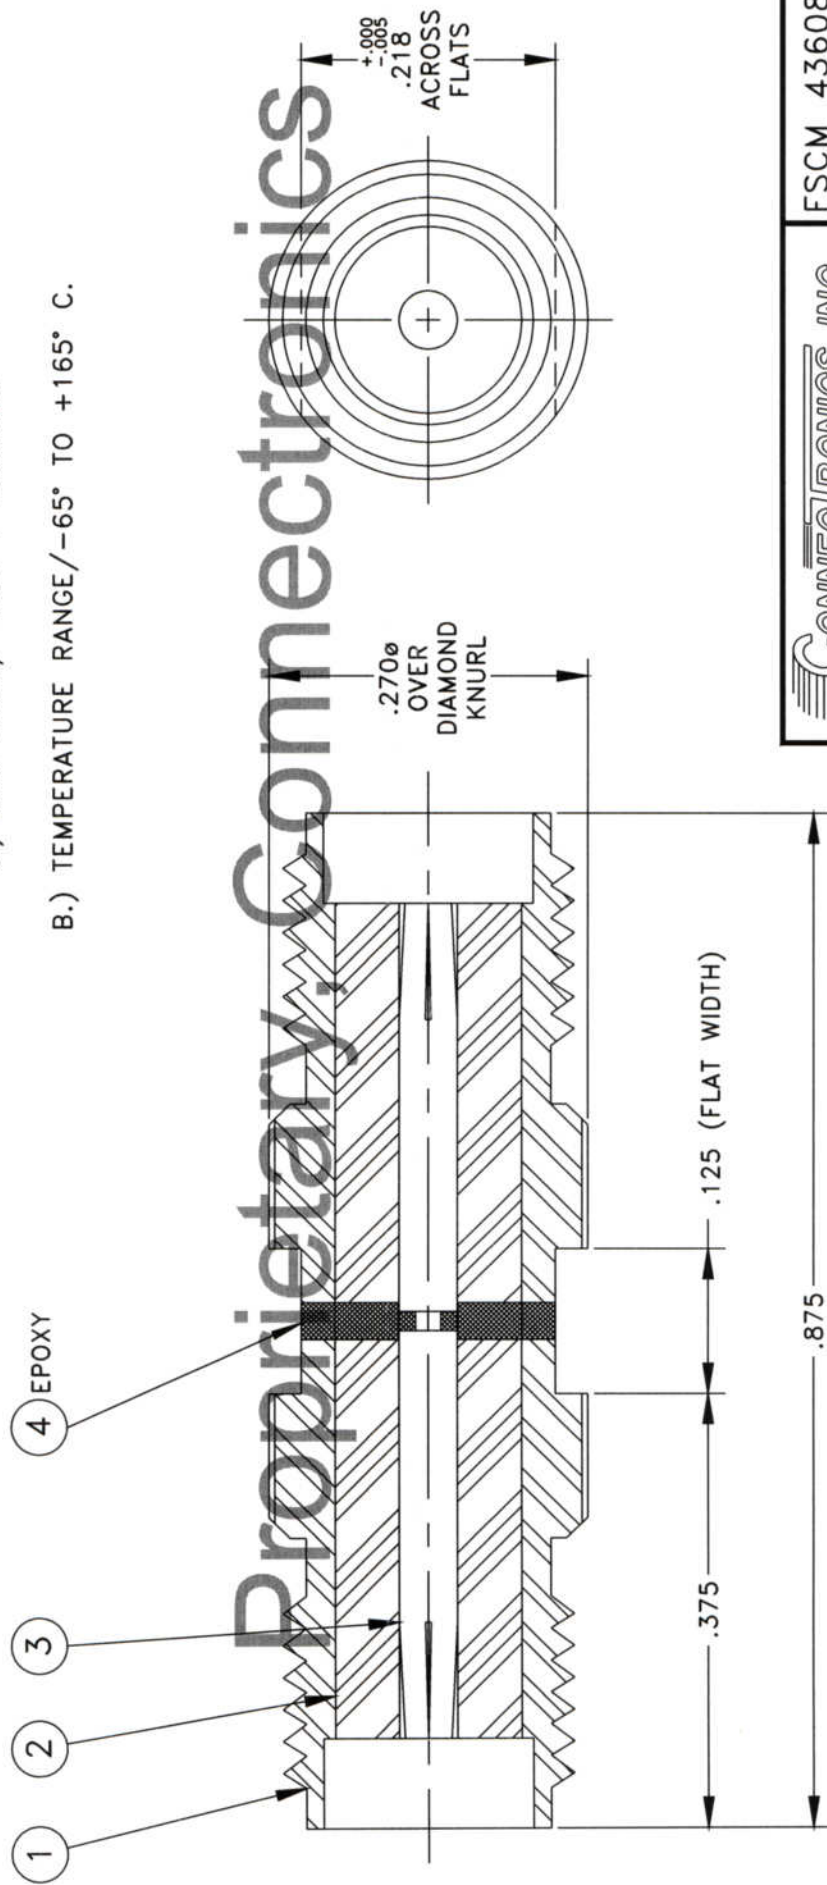

Proprietary, Connectronics

CONNECTRONICS, INC. EDINBURGH, INDIANA		FSCM 43608
DWG BY: JOHN B	DATE: 12/4/93	TOLERANCES UNLESS OTHERWISE SPECIFIED
APVD BY:	SCALE:	2 PL DEC ±.020
MATERIAL:		3 PL DEC ±.005
FINISH:		ANG. DIM ±1/20
DESCRIPTION: SMA		DRAWING NO.
ADAPTOR, JACK TO JACK		42-620
		SHT 1 OF 1

REVISIONS

-A-	ECN3602	ADDED -2 AND NOTES.	1/16/04	RLC
-B-	ECN3669	ADDED -3, CHARTED MAT'L.	4/1/04	RLC
-C-	ECN4290	ADDED FLATS & END VIEW.	2/28/06	DZ