
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.

ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PAR	RFB-1134			
REV	DESCRIPTION	DWN	DATE	APPROVED
1	ENGINEERING RELEASE	czs	6/15/94	JDMc
Α	CHANGED TEMP SPECIFICATIONS	JDM	1/17/11	JDMc

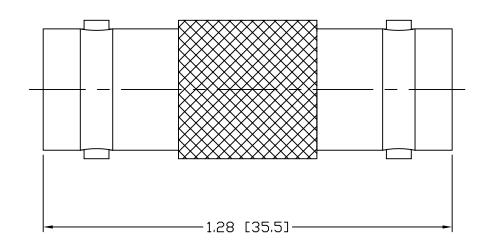

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-2 GHz

WORKING VOLTAGE: 500 V rms @ sea level

TEMPERATURE RANGE: -65°C TO 85°C

2 3	BODY INSULATOR CONTACT PRESS WASHER	2	POLYPROPYLENE COPPER	NICKEL, 80μ " GOLD, 3μ " NICKEL, 80μ "	000360		3. CHAMFER 1ST & L 4. SURFACE ROUGHNE	RS & EDGES .005 R. MAX.		1 1/ /		neefors	7610 MIRAN SAN DIEGO, (858) 549- (858) 549-	CA 92126 -6340
8 9					DRAWN JDM	1/17/11	AND [MILLIN	RE AFTER PLATING.		BNC J		K TO	JAC	K
11 12 13 14	DESCRIPTION	QTY	MATERIAL	FINISH	CHECKED ORJ DRAWN C. ZUNIGA APPROVALS	9/23/02 DATE	TOLERANCE DECIMALS		SIZE A SC/	CABLE GROUP	ΆΙ	DWG NO. RFB—1	134	REV 1 OF 1