


- 1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-4GHz
 1.2 VOLTAGE RATING: 500V RMS (sea level)
 1.3 NOMINAL IMPEDANCE: 50 OHMS
 1.4 DWV: 1500V RMS @ 60 Hz (sea level)
 1.5 TEMPERATURE RANGE: -65°C TO +165°C
 2.0 MATERIALS
 2.1 DIELECTRIC: TEFLON, ASTM-D-1710
 2.2 GASKET: SILICON RUBBER, ZZ-R-765 GR. 50, RED

- 2.3 CENTER CONTACT: BERYLLIUM COPPER, ASTM-B-196
 2.4 LOCKING RING: PHOSPHOR BRONZE, ASTM-B-159, ALLOY 510
 2.5 OTHER METAL PARTS: BRASS, ASTM-B-16
 3.0 FINISHES
 3.1 CENTER CONTACT: SEE TABLE
 3.2 ALL OTHER METAL PARTS: SEE TABLE
 4.0 MECHANICAL
 4.1 INTERFACES IN ACCORDANCE WITH MIL-STD-348

DWG NO. OL-201A*-1
 REV. A

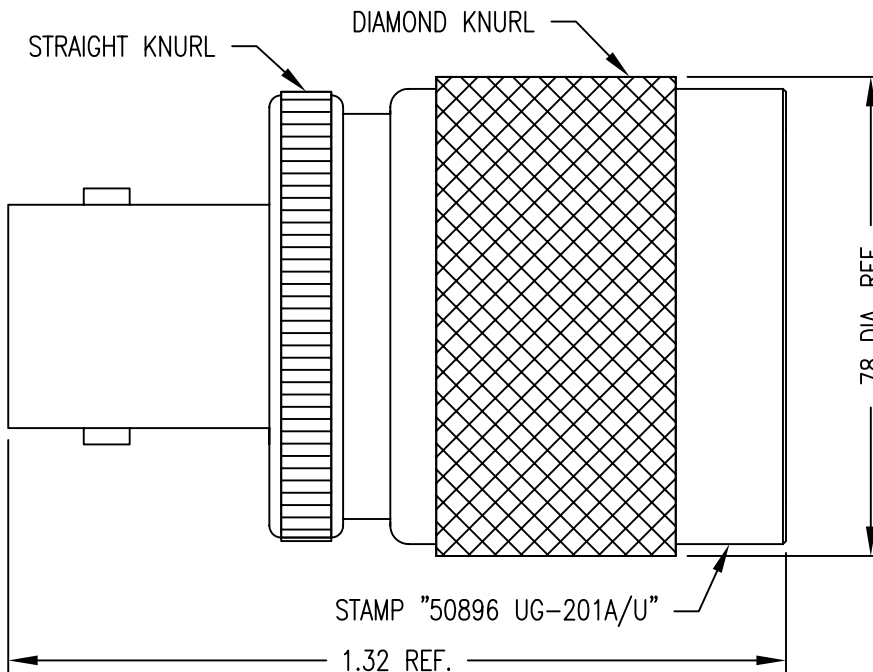

* STI PART NO.	BODY PLATING	CONTACT PLATING
UG-201 A/U	NICKEL	SILVER
UG-201 A/U NI/GOLD	NICKEL	GOLD

PROPRIETARY
 THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.



SAN • TRON, INC.

4 NEWBURYPORT TPK, IPSWICH, MA 01938

REMOVE ALL BURRS AND SHARP EDGES .005 MAX.
 UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING

TITLE ADAPTER, STRAIGHT,
 N (M) - BNC (F)

MATERIAL: SEE NOTE 2.0
 FINISH: SEE TABLE

FSCM NO. 50896
 SCALE 3:1
 DWG NO. OL-201A*-1
 REV. A

UNSPECIFIED TOL.	DWN	MM	4/16/99
DEC. ± .005	CHKD	SJS	4/16/99
FRAC. ± 1/64	APPR		
ANG. ± 1/2°			

CONCENTRICITY .004 TIR
 ALL MACHINED SUFACES ✓

Rev.	Revisions	Date	Dwn.	Appd.
A	ORIGINAL	4/16/99		

RECOM.	STOCK SIZE	FT/M PCS	QTY REQD