

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of Winchester Interconnect. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of Winchester Interconnect.

REV	DESCRIPTION	DATE	APRD
A	REDRAW TO CAD ONLY ER074833	9/18/2018	ASNZ

NOTES:


MATERIALS:  
 STAINLESS STEEL 303 PER ASTM A484 AND A582.  
 BERYLLIUM COPPER PER ASTM-B-196, QQ-C-530  
 PTFE PER ASTM-D-1710.



FINISH:  
 CENTER CONDUCTORS AND SOLDER COMPONENTS SHALL BE PLATED PER MIL-G-45204.  
 TYPE II, CLASS 1 OVER NICKEL PLATE PER QQ-N-290.  
 BODY AND BODY COMPONENTS SHALL BE PASSIVATED PER ASTM A380.

FREQUENCY:  
 DC-18 GHz

VSWR:  
 1.15 TO 18 GHz

INSERTION LOSS:  
 .05 (FREQUENCY)

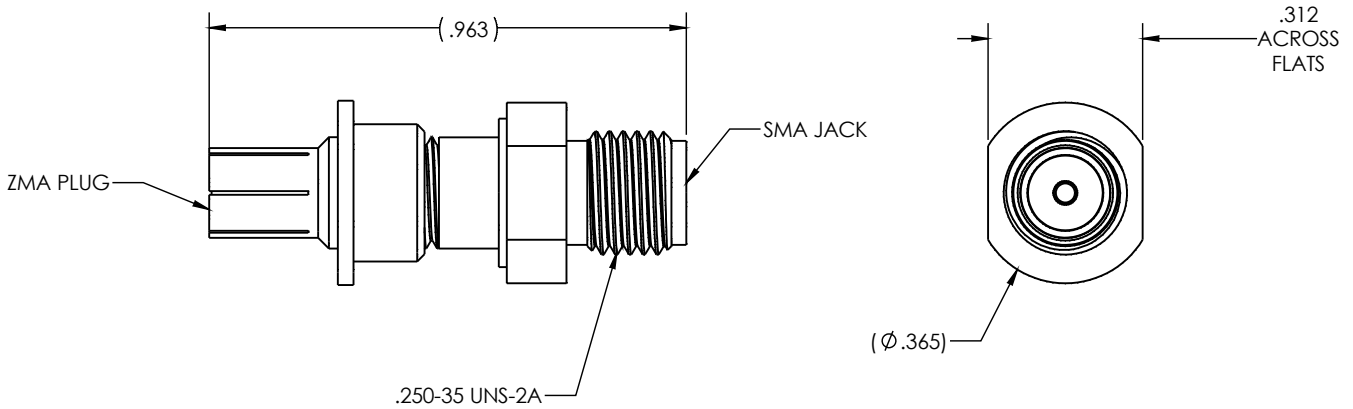

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	DRAWN LMW	DATE 07/13	 245 Lynnfield St. Peabody, MA 01960
	APPR.	DATE	
TOLERANCES: .X: ±0.030 .XX: ±0.010 .XXX: ±0.005 ANGLES: X° ±1° X°X': ±15' FRACTIONALS: ±1/64 MACHINED SURFACES: 32/	APPR.	DATE	TITLE: ZMA PLUG TO SMA JACK
		dcamello	