



MICROWAVE PRODUCTS DIVISION  
**HI-PERFORMANCE MICROWAVE CONNECTORS**

ACCOUNT LOG-IN

Log-in


[Create Account](#) | [Forgot Password](#)

[HOME](#) | [ABOUT US](#) | [PRODUCTS](#) | [PRODUCT FINDER](#) | [NEWS & EVENTS](#) | [RESOURCE CENTER](#) | [CONTACT](#)

FOLLOW US

## SSMA(f) to 2.40mm(f) Adapter — 40 GHz

11410-00SF

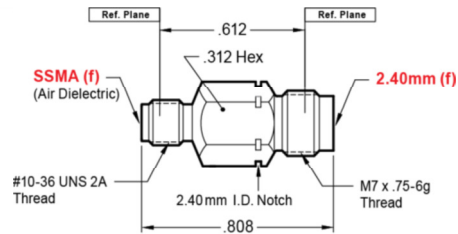

### Application:

- DC to 40.0 GHz High Performance

### Features:

- Mode Free Through 40.0 GHz
- Low VSWR:
  - DC to 27.0 GHz...1.10:1 max.
  - 27.0 to 40.0 GHz..1.15:1 max.
- Performance Consistency Unit-to-unit
- Temperature Rating
  - 55°C to +135°C

### Interface:

- Per MIL-STD-348
  - SSMA Figs. 319-1 and 319-2
  - 2.40 mm Figs. 324-1 and 324-2

### Construction:

- Housing: Stainless Steel, Passivated
- Contact: Beryllium Copper (BeCu) Gold Plated Per MIL-G-45204
- Center Contact Capture:
  - Ultem 1000 Per ASTM D5205
  - and KEL-F Per ASTM D1430

## PRODUCTS



[PRODUCT FINDER](#)

- » Super SMA Connectors
- » N Connectors
- » TNC Connectors
- » SSMA Connectors
- » 2.92 mm Connectors
- » 2.40 mm Connectors
- » 1.85 mm Connectors
- » End Launch Connectors
- » Adapters
- » Cable Connectors
- » Launch Accessories
- » Installation and Tools
- » SSBP
- » Beyond the Catalog (PDF)
- » Catalog Appendix (PDF)

### ADD TO PROJECT

Please login at the top of the page to add products to your projects.

[Mailing List](#) | [Employment](#) | [Legal Statement](#) | [U.S Export Compliance](#) | [Order Information](#) | [Security Systems Division](#)

©2012 Southwest Microwave, Inc. All Rights Reserved.

