




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/30/21	J.S.
B	UPDATE CABLE, NOTE 2	02/14/22	J.S.



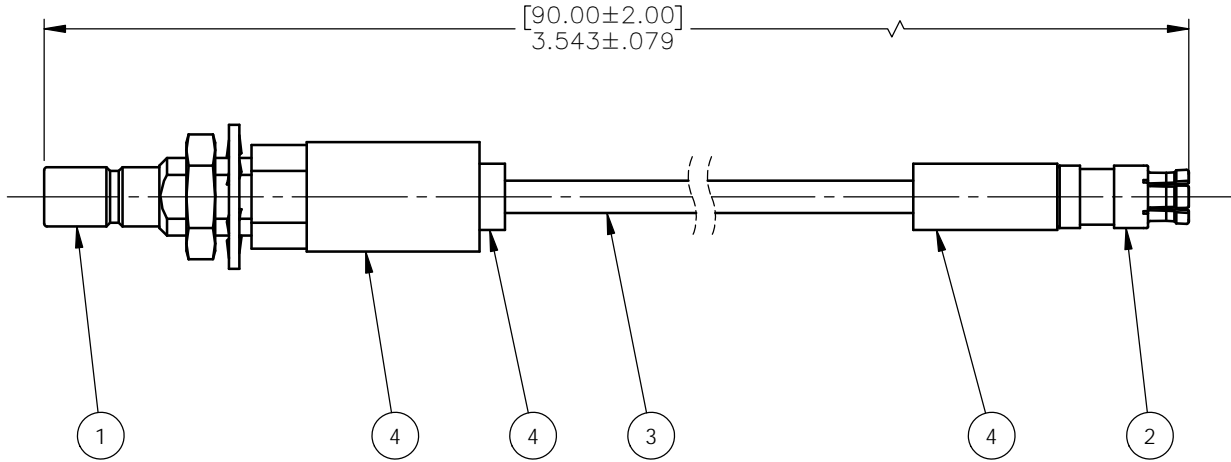

COMPONENTS

- ITEM 1: SSMB STRAIGHT MALE JACK, RADIALL AEP P/N: 7203-1541-011
- ITEM 2: SMPM STRAIGHT FEMALE, RADIALL P/N: R201051000
- ITEM 3: COAXIAL CABLE, .047 TEMP-FLEX, MOLEX P/N: 1001935047 OR 047SC-2901
- ITEM 4: SHRINK SLEEVE, BLACK, ATUM SERIES PER SAE-AMS-DTL-23053/4

NOTES:

- 1. DIMENSIONS IN [] ARE IN mm.
- 2. ELECTRICAL REQUIREMENTS:
 - A. EACH LOT OF 8 CABLES TO BE PHASE MATCHED TO $\pm 3^\circ$ AT 3GHz

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: J.S.	DATE 11/30/21	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.		
	CHKD: B.B.	DATE 11/30/21			
DECIMAL	ANGLE	APVD: J.M.	CONTROL DRAWING CABLE ASSEMBLY MOTOROLA		
		DATE 11/30/21			
REFERENCE: 21003778 ORIGINATED: J.S. DATE: 11/30/21	MATERIALS & FINISHES: SEE ABOVE	SIZE A	FSCM NO. 19505	DWG NO. R296652553	REV B
		SCALE 3:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

R296652553