


MATERIALS AND FINISHES

2.92 PLUG:
SEE SD-73252-011

CABLE:
TEMP-FLEX AIR CORE 086-2201

LABEL:
BRADY PERMASLEEVE

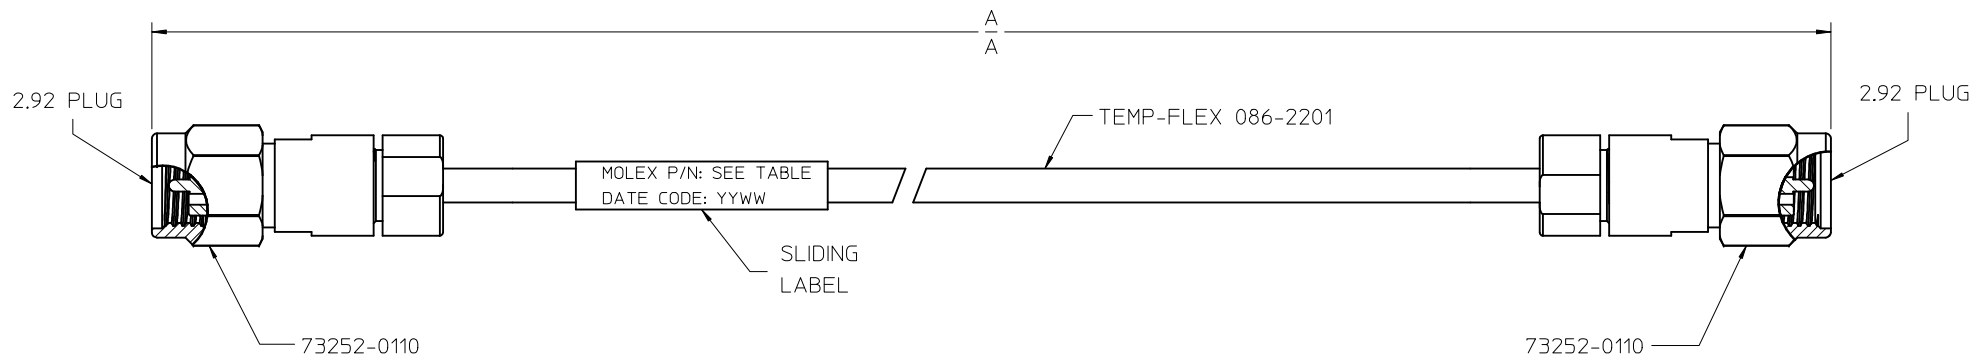

89762-1325	120.0	3048	16.0
89762-1324	18.00	457.2	2.40
89762-1323	15.00	381.0	2.00
89762-1322	12.00	304.8	1.60
89762-1321	9.00	228.6	1.20
89762-1320	6.00	152.4	0.80
PART NO.	IN	MM	INSERTION LOSS MAX TO 40 GHz (dB)
A			

VSWR 1.40 MAX TO 40 GHz

MIL-STD-348A, FIG. 323.1		INTERFACE	
SPECIFICATION		DESCRIPTION	
DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS INCH
DRAWN BY AROBERTSON		DATE 2013/03/20	TITLE 2.92 PLUG ST X2 ON TEMP-FLEX 086-2201 CABLE CA-292/292, EWR-4902
CHECKED BY SSS		DATE 2013/03/20	molex
APPROVED BY JWIENER		DATE 2013/03/27	
MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-89762-132	SHEET NO. 1 OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

CHG: RELEASE DRAWING. EC NO: URF2013-0523 DRAWN: AROBERTSON 2013/03/26 CHKD: SSS 2013/03/26 APPR: JWIENER 2013/03/27	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
	▽=0	mm INCH
	▽=0	4 PLACES ± --- ± ---
	▽=0	3 PLACES ± --- ± ---
		2 PLACES ± --- ± ---
		1 PLACE ± --- ± ---
		0 PLACE ± --- ± ---
		ANGULAR ± 2°