


PAGE 1/1

ISSUE **13/10/2021**

SERIES **Flexible Low Loss**

PART NUMBER **0601361360914GX**

All dimensions are in mm  
For more details, please see connectors TDS

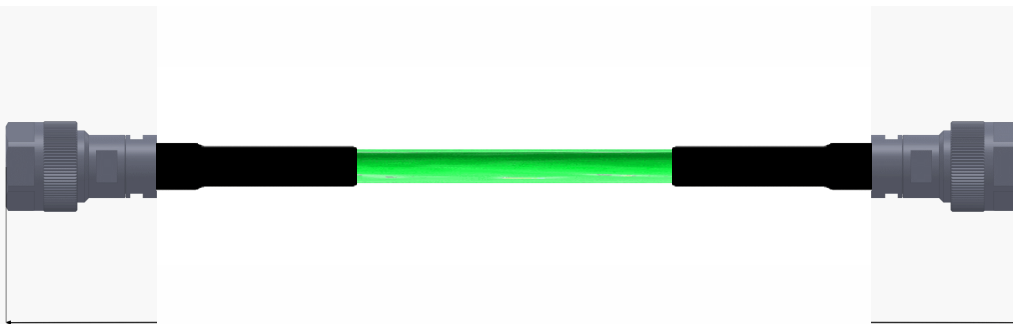

DESIGNATION

Cable	<b>8mm ePTFE - solid cc - P/N - SHF8M</b>
Connector Left	<b>N 18 - straight plug - passivated stainless steel - P/N: R161068000</b>
Connector Right	<b>N 18 - straight plug - passivated stainless steel - P/N: R161068000</b>
Assembly Length	<b>914 mm / 36.00 inch (tolerance = ± 2%)</b>
Assembly Weight	<b>198.87 gr / 7.02 oz (tolerance = ± 5%)</b>

ELECTRICAL CHARACTERISTICS

Characteristic impedance	<b>50 Ohms</b>
Max operating frequency	<b>18.0 GHz</b>
Assembly Typ Insertion Loss	<b>0.92 dB (at 20 °C, at 18.0 GHz )</b>
Assembly Typ VSWR	<b>1.25 (at 18.0 GHz )</b>
Assembly Max. Insertion Loss	<b>1.00 dB (at 20 °C, at 18.0 GHz )</b>
Assembly Max VSWR	<b>1.30 (at 18.0 GHz )</b>
Assembly Max Return Loss	<b>17.7 dB (at 18.0 GHz )</b>
Phase stability vs. Temp	<b>1° / m / GHz (-55° / +100°C)</b>
Dielectric withstanding voltage	<b>1500 V</b>
Insulation resistance	<b>5000 M.Ohms</b>
Other	<b>Note: Max IL are indicative only when superior to 40dB</b>

MECHANICAL CHARACTERISTICS

Cable Outer diameter	<b>7.78 mm Max   0.306 inch</b>
Static bending radius	<b>40.0 mm   1.57 inch</b>
Dynamic bending radius	<b>80.0 mm   3.15 inch</b>

ENVIRONMENTAL CHARACTERISTICS

Temperature range	<b>-55 +125°C</b>
Fire resistance	<b>Yes</b>