

MATERIALS AND FINISHES

SMP JACK:
 BODY, CENTER CONTACT: BERYLLIUM COPPER
 FINISH: GOLD


INSULATOR: TEFLON

EMI RING: BRASS
 FINISH: GOLD

CABLE:
 TEMP-FLEX 086-2201

LABEL:
 BRADY PERMASLEEVE

SHRINK TUBE:
 VERSAFIT

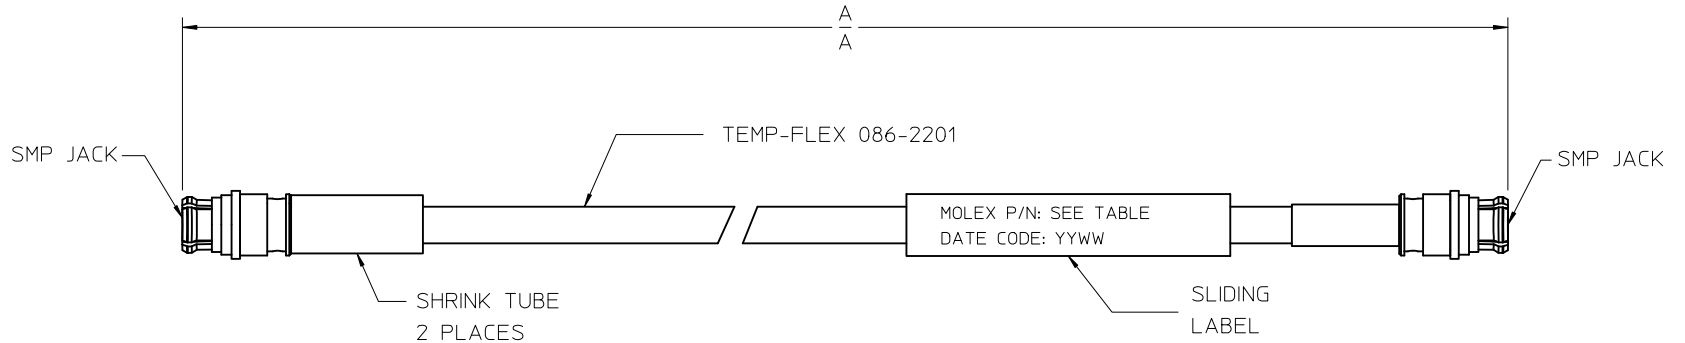

89762-1423	120.0	3048	15.0
89762-1422	12.00	304.8	1.50
89762-1421	9.00	228.6	1.12
89762-1420	6.00	152.4	0.75
PART NO.	IN	MM	MAX INSERTION LOSS TO 26 GHz (dB)
A			MAX VSWR 1.70 @ 26 GHz

CHG: NEW RELEASE EC NO: 2013/03/28 IDRAWN: JLEE02 CHKD:SSS APPR: 2013/03/28	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM/IN	METRIC	⊙	
	▽=0	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE		
	▽=0	3 PLACES ± --- ± ---	JLEE02 2013/03/28	CA SMP J X2 TF086-2201		
	2 PLACES ± --- ± ---	CHECKED BY DATE	EWR-5133, CA-SMP/SMP			
	1 PLACE ± --- ± ---	SSS 2013/03/28	molex			
	0 PLACE ± --- ± ---	APPROVED BY DATE				
	ANGULAR ± 2 °	MATERIAL NO.	DOCUMENT NO.		SHEET NO.	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	SD-89762-142		1 OF 1	
		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			