


CABLE ASSEMBLY

DWG NO.

RFW-10860-6

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	03/20/12	JDMc

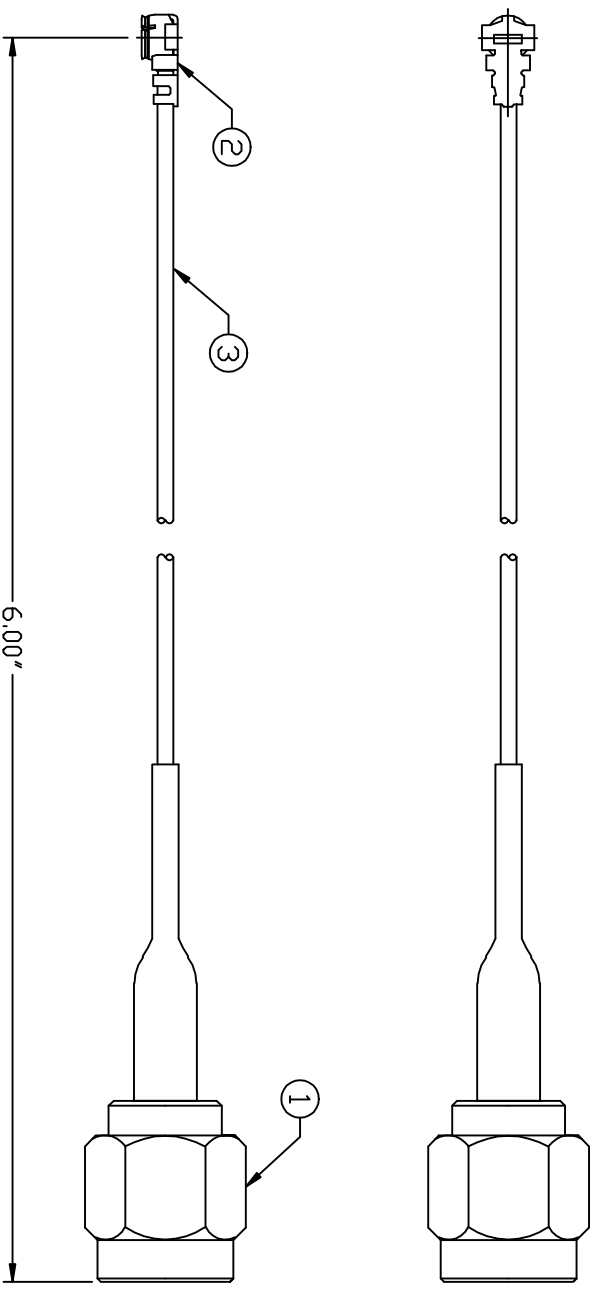

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 CABLE STYLE: 200' 30V COAXIAL
 ITEM: 32 AWG
 JACKET:
 AVERAGE THICKNESS: .13mm
 DIAMETER: 1.13mm ± .03
 MATERIAL: FEP
 NOMINAL CAPACITANCE: 96 pF/m
 NOMINAL VEL. OF PROP: 96%
 ATTENUATION (dB/100m): 1800MHz (300) 2400MHz (480) - 5200MHz (720)
 RATING TEMP VOLTAGE: 200' 30V
 CONDUCTOR RESISTANCE: 545 Ohm°C MAX.
 INSULATION RESISTANCE: 100 Mohm/KM MIN.
 DIELECTRIC STRENGTH: AC 1.0KV
 SPARK TEST: 0.5 KV

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
3	CABLE	1	1.13	GRAY
2	CONNECTOR	1	U.FL TYPE (MHF)	---
1	CONNECTOR	1	SMA PLUG	---

RF COMPLIANT

RF Connectors
 DIVISION OF RF INDUSTRIES, LTD.
 7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

**MHF PLUG TO SMA PLUG
 LEAD FREE**

DRAWN JDMc	4/26/13
CHECKED	
ORJ DRAWN C. ZUNIGA	12/24/08
APPROVALS	DATE

SIZE A	DWG NO. RFW-10860-6	REV -
CABLE GROUP 1.13	SHEET 1 OF 1	