


***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	10/09/09	MJK	MJK
B	REVISED CLAMP NUT VIEW	06/09/10	MJK	MJK

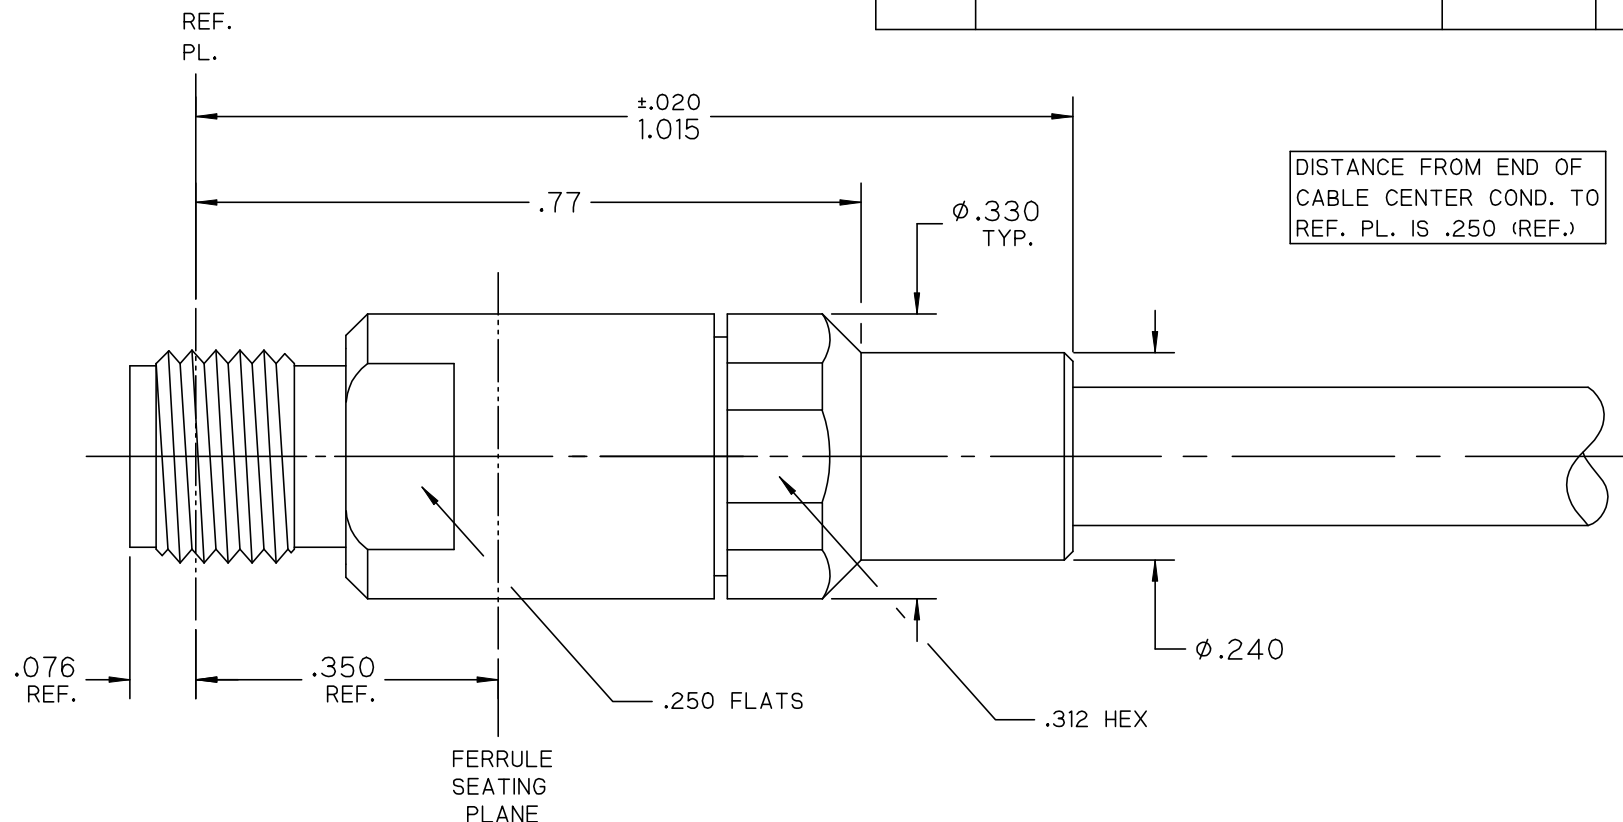

NOTES :

1.0 MATERIALS:

- 1.1 BODY & CLAMP NUT: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.2 CENTER COND.: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.3 SOLDER FERRULE: BRASS PER ASTM-B16, UNS C36000.
- 1.4 O-RING: SILICONE RUBBER PER A-A-59588.
- 1.5 DIELECTRIC BEAD : POLYCHLOROTRIFLUOROETHYLENE (PCTFE) PER ASTM-D1430-95. (KEL-F)

2.0 FINISHES:

- 2.1 CENTER CONTACT & SOLDER FERRULE: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.
- 2.2 BODY & CLAMP NUT: PASSIVATE PER SAE-AMS-2700.
- 2.3 O-RING & DIELECTRIC BEAD: NONE.
- 3.0 INTERFACE: 2.92mm SOCKET PER PCI-2.92mm-S0C. (MEETS IEEE-STD-P287, FIGURE G.4, EXCEPT CONDUCTOR TOLERANCES AND CONTACT RESSION).



TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY: MJK		PART DESCRIPTION: 2.92mm JACK, SOLDER CLAMP FOR SEMFLEX HP160		
.XX ± .02		DATE: 10/09/09				
.XXX ± .005		CAGE CODE		SCALE	SHEET NO.	DRAWING NUMBER
.XXXX ± .0005		4MJR5		9:2	1 OF 1	3312-0L
ANGLES ± 2°						REV
						B