



MICROWAVE PRODUCTS DIVISION
HI-PERFORMANCE MICROWAVE CONNECTORS

ACCOUNT LOG-IN

email

password

Log-in

[Create Account](#) | [Forgot Password](#)
[HOME](#) | [ABOUT US](#) | [PRODUCTS](#) | [PRODUCT FINDER](#) | [NEWS & EVENTS](#) | [RESOURCE CENTER](#) | [CONTACT](#)

FOLLOW US


2.92mm End Launch Connector (40 GHz)

1093-04A-5

Gender: Male
 Dim A Board Pin: 0.005
 Dim B Internal Pin: 0.009
 Dim C Dielectric Dia: 0.029

End Launch Connectors - Specifications

Applications

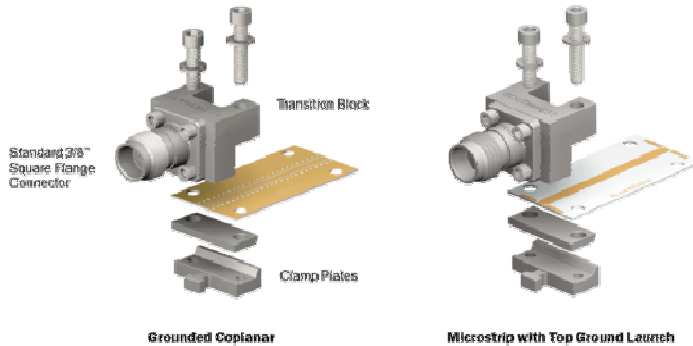

Electrical:

- Mode Free Through:
- 27.0 GHz (SMA)
- 40.0 GHz (2.92 mm)
- 50.0 GHz (2.40 mm)
- 67.0 GHz (1.85 mm)

Materials/Construction:

Connector:

(see appropriate connector section for materials and construction.)

Transition Block & Clamp Plates:

- Housing: Brass Alloy UNS C36000 Per ASTM B16, Nickel Plate Per ASTM 2404B
- Transition Pin: Beryllium Copper (BeCu) Per UNS C36000 Per ASTM B16, Gold Plate Per MIL-G-45204 or ASTM B488
- Dielectric: Virgin PTFE Fluorocarbon Per ASTM D1710
- Fasteners: Per ANSI B18.3

ADD TO PROJECT

Please login at the top of the page to add products to your projects.

PRODUCTS


[PRODUCT FINDER](#)

- » Super SMA Connectors
- » N Connectors
- » TNC Connectors
- » SSMA Connectors
- » 2.92 mm Connectors
- » 2.40 mm Connectors
- » 1.85 mm Connectors
- » End Launch Connectors
- » Adapters
- » Cable Connectors
- » Launch Accessories
- » Installation and Tools
- » SSBP
- » Beyond the Catalog (PDF)
- » Catalog Appendix (PDF)

[Mailing List](#) | [Employment](#) | [Legal Statement](#) | [U.S Export Compliance](#) | [Order Information](#) | [Security Systems Division](#)

©2012 Southwest Microwave, Inc. All Rights Reserved.

