

24-000-1008-90

NOTES:


Materials: SST. corrosion-resistant, Non Magnetic 303, per ASTM A484 and A582. Beryllium Copper per ASTM-B-196, QQ-C-530 Oxide-Noryl (tm), MIL-P-46129


Finish: Center Conductors, body and solder components shall be plated per MIL-G-45204 Type II, Class 1 over Nickel plate per QQ-N-290.

Frequency: DC-40 GHz

VSWR: 1.25 TO 40 GHz

Insertion Loss:  $.05\sqrt{\text{Frequency}}$

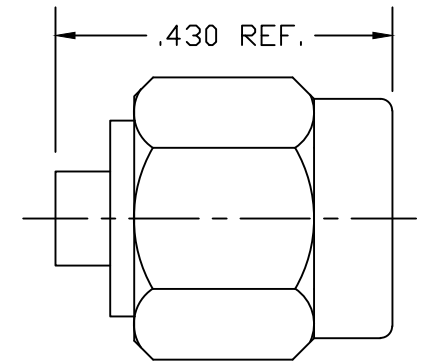

LTR	DESCRIPTION	DATE	APPR.	DRAWN LRH	CHECKED	USED ON	 SRI CONNECTOR GAGE CO. 751 NORTH DRIVE MELBOURNE FL. 32934	
-	REL	12/99		APPR.	SCALE NTS	24-000-1008-90	TITLE 2.9mm PLUG TO .085 LOW LOSS SEMI RIGID CABLE DIRECT SOLDER	
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32√ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			FINISH	
				DIMENSIONS ARE IN INCHES TOLERANCES			SIZE	FSCM NO.
				DECIMALS	FRACTIONAL	ANGULAR	A	OHMO1
				.X ±.030		.X° ±1°0'		
				.XX ±.010	± 1/64	.X'X' ±15'		
				.XXX +.005				
							SHEET 1	DWG. NO. 24-000-1008-90