


***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	05/20/09	MJK	MJK

THIS P/N WAS 1-001-2051-0

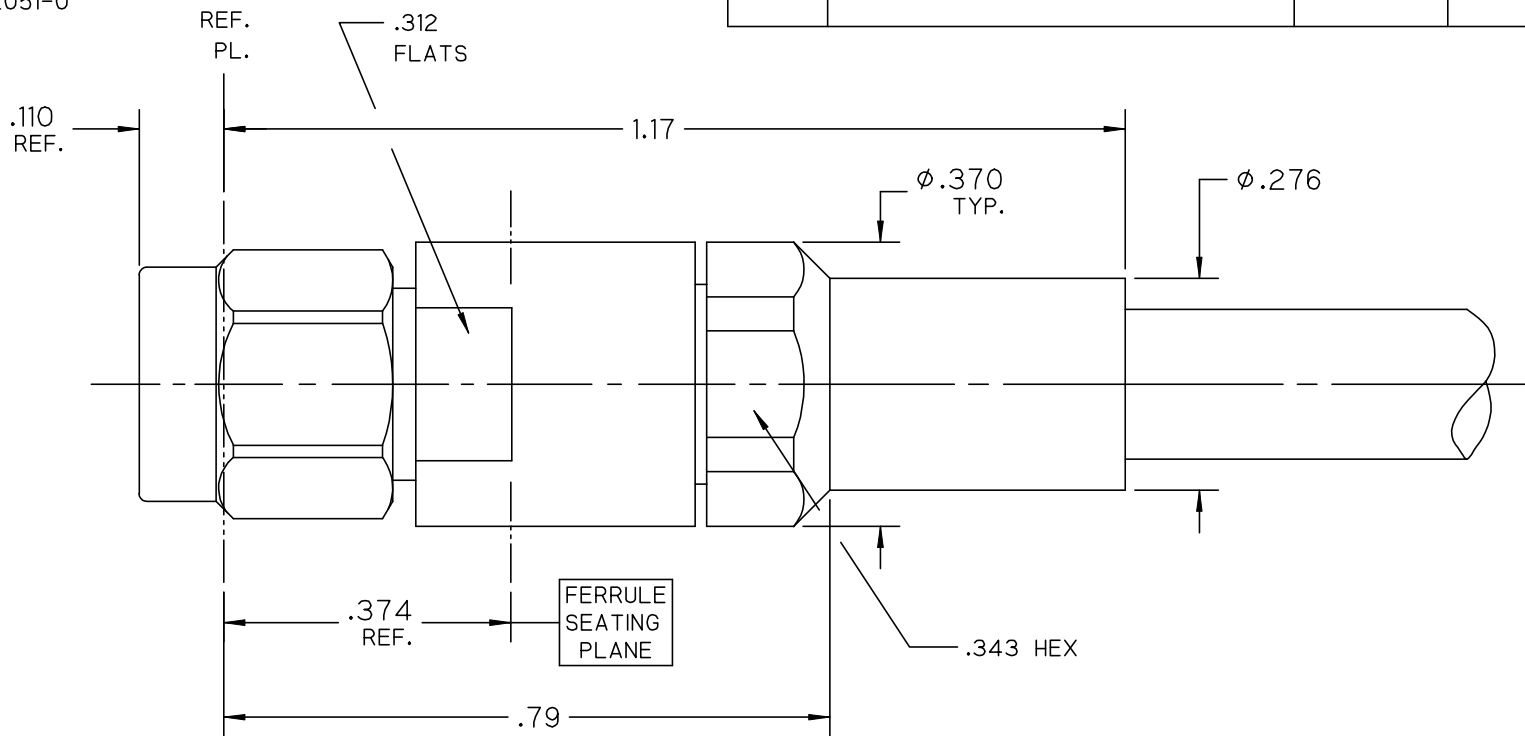

NOTES :

1.0 MATERIALS:

- 1.1 BODY, COUPLING & CLAMP NUTS: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.2 CENTER COND.: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.3 SOLDER FERRULE: BRASS PER ASTM-B16, UNS C36000.
- 1.4 LOCK RING: BERYLLIUM COPPER PER ASTM-B197, UNS C17200.
- 1.5 GASKET & O-RING: SILICONE RUBBER PER A-A-59588.
- 1.6 DIELECTRIC BEAD: POLYPHENYLENE OXIDE (NORYL) PER ASTM-D4349.
- 1.7 CABLE STOP: POLYETHERIMIDE THERMOPLASTIC (ULTEM 1000) PER ASTM-D5205.

NOTE: MAY ALSO BE USED WITH TIMES LAB-FLEX 200 CABLE.

2.0 FINISHES:

- 2.1 CENTER CONTACT & SOLDER FERRULE: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.
 - 2.2 BODY, COUPLING & CLAMP NUTS: PASSIVATE PER SAE-AMS-2700.
 - 2.3 GASKET, O-RING, LOCK RING & DIELECTRICS: NONE.
- 3.0 INTERFACE PER PCI-2.92mm-PIN.



TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN BY: MJK		DESC.: 2.92mm PLUG, SOLDER CLAMP FOR HARBOUR LL142 CABLE			
.XX ± .02		DATE: 05/20/09		SCALE	SHEET NO.	DRAWING NUMBER	REV
.XXX ± .005		CAGE CODE		5:1	1 OF 1	3156-0L	A
.XXXX ± .0005		4MJR5					
ANGLES ± 2°							