


***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	04/14/10	MJK	MJK

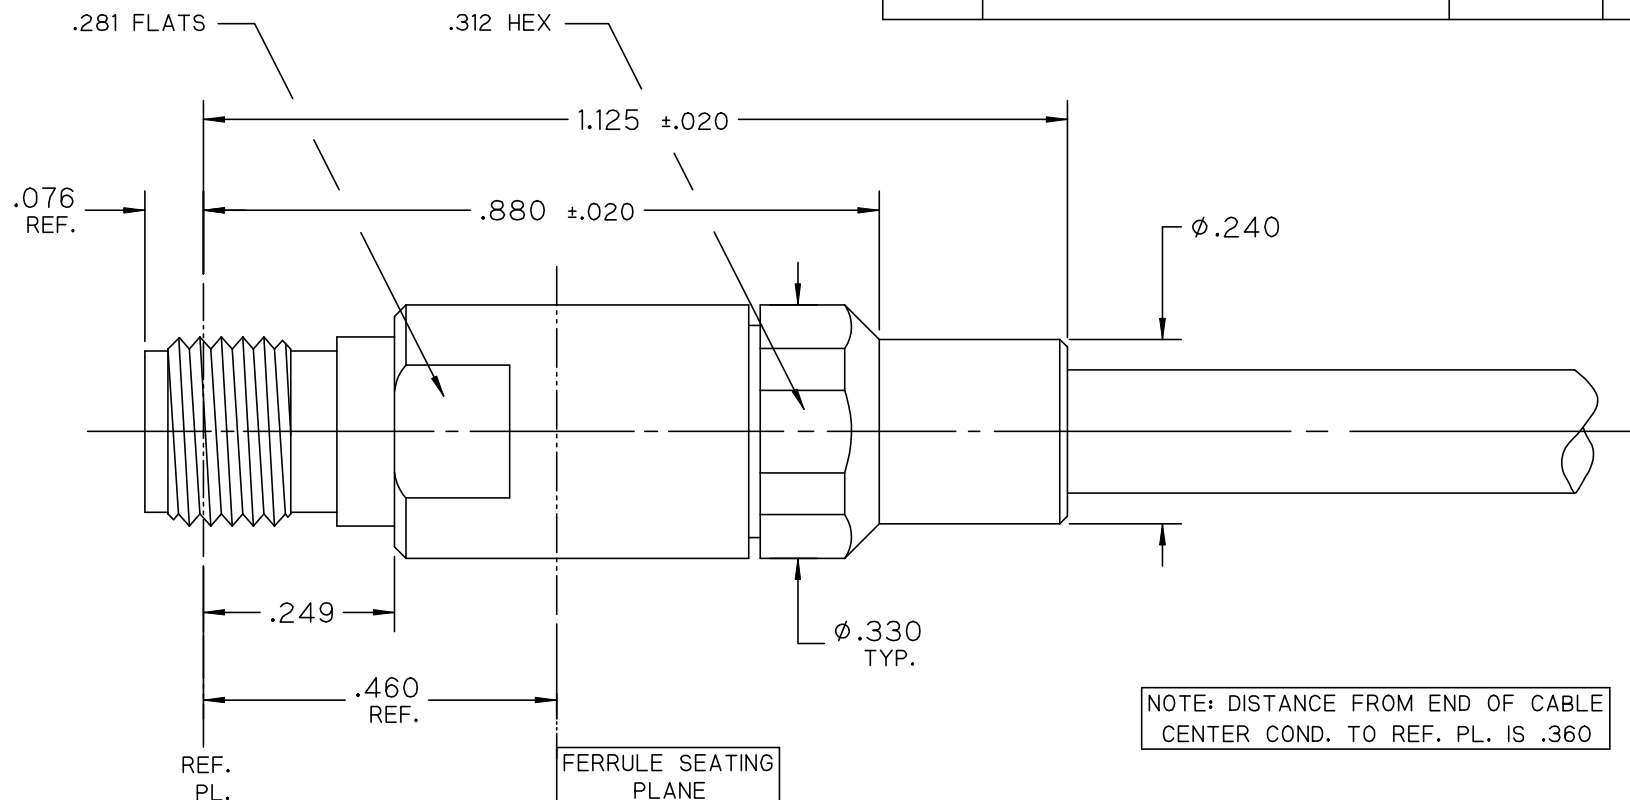

NOTES :

1.0 MATERIALS:

- 1.1 BODY & CLAMP NUT: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.2 CENTER COND.: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.3 SOLDER FERRULE: BRASS PER ASTM-B16, UNS C36000.
- 1.4 O-RING: SILICONE RUBBER PER A-A-59588.
- 1.5 DIELECTRIC BEAD : POLYCHLOROTRIFLUOROETHYLENE (PCTFE) PER ASTM-D1430-95. (KEL-F)

2.0 FINISHES:

- 2.1 CENTER CONTACT & SOLDER FERRULE: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.
- 2.2 BODY & CLAMP NUT: PASSIVATE PER SAE-AMS-2700.
- 2.3 O-RING & DIELECTRICS: NONE.

3.0 INTERFACE PER PCI-3.5mm-SOC.



TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY: MJK	DESC.: 3.5mm JACK, SOLDER CLAMP FOR SEMFLEX HP160 CABLE			
	DATE: 04/14/10	CAGE CODE	SCALE	SHEET NO.	DRAWING NUMBER
.XX ± .02	4MJR5	5:1	1 OF 1	3416-OL	A
.XXX ± .005					
.XXXX ± .0005					
ANGLES ± 2°					