
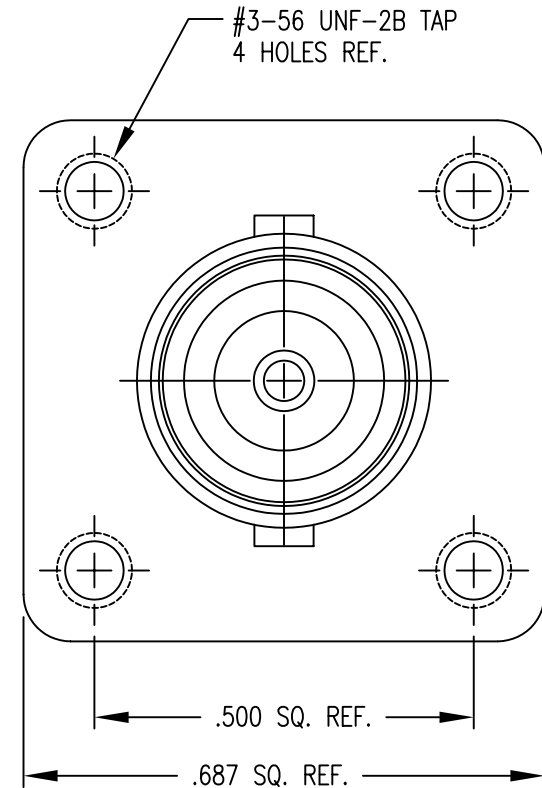


- 1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-4GHz
 1.2 VOLTAGE RATING: 500V RMS (sea level)
 1.3 NOMINAL IMPEDANCE: 50 OHMS
 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
 1.5 TEMPERATURE RANGE: -65°C TO +165°C
 2.0 MATERIALS
 2.1 DIELECTRIC: TEFLON, ASTM-D-1710

- 2.2 CONTACT: BERYLLIUM COPPER ASTM-B-196
 2.3 ALL OTHER METAL PARTS: BRASS PER ASTM-B-16
 3.0. FINISHES
 3.1 CONTACT: SILVER PLATED
 3.2 ALL OTHER METAL PARTS: NICKEL PLATED
 4.0 MECHANICAL
 4.1 INTERFACE WILL MATE WITH CONNECTORS
 AND ADAPTERS WHICH HAVE MIL-STD-348 BNC INTERFACES

DWG NO.
OL-290A-1

REV.
A

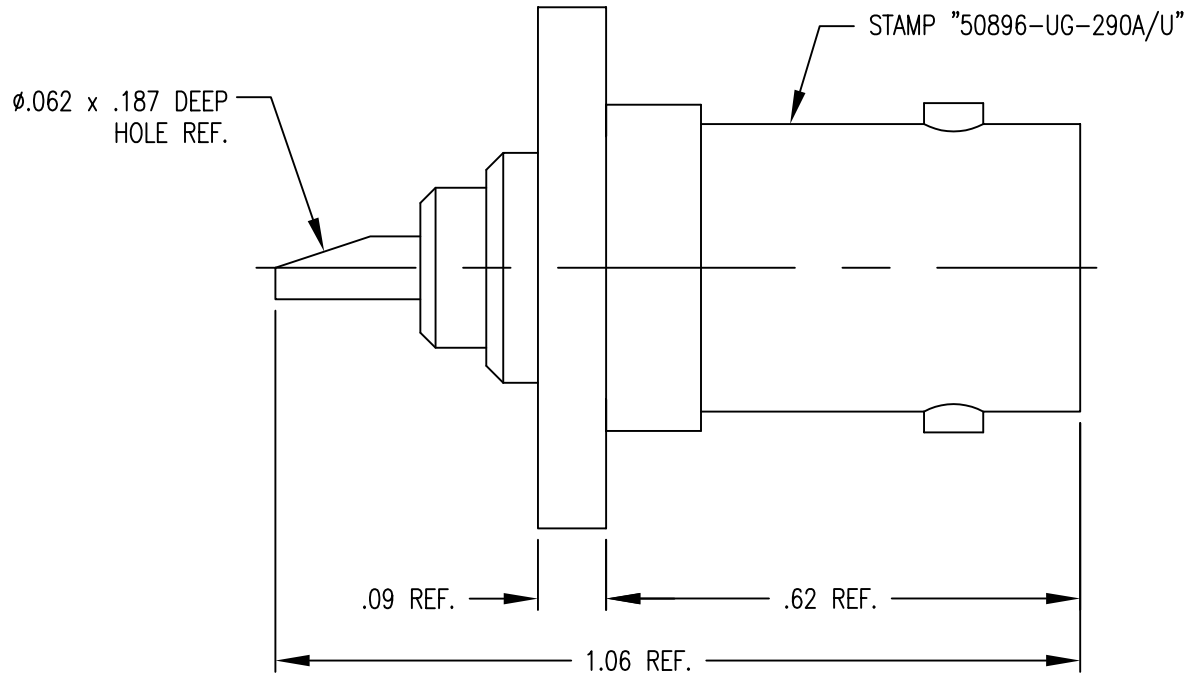

A	ORIGINAL	12/7/01		
Rev.	Revisions	Date	Dwn.	Appd.
	RECOM. STOCK SIZE	FT/M PCS	QTY REQD	


PROPRIETARY
 THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.

REMOVE ALL BURRS AND SHARP EDGES .005 MAX.
 UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING

UNSPECIFIED TOL.	DWN	JMB	6/2/00
DEC. $\pm .005$	CHKD	SJS	12/6/01
FRAC. $\pm 1/64$	APPR	JO	12/7/01
ANG. $\pm 1/2^\circ$			

CONCENTRICITY .004 TIR
 ALL MACHINED SURFACES \checkmark 63/

SAN • TRON, INC.
 4 NEWBURYPORT TPK, IPSWICH, MA 01938



TITLE BNC PANEL RECEPTACLE, STRAIGHT
 11/16 SQ. FLANGE

MATERIAL: SEE NOTE 2.0 FINISH: SEE NOTE 3.0

FSCM NO. 50896 DWG NO. OL-290A-1 REV. A

SCALE 4:1