
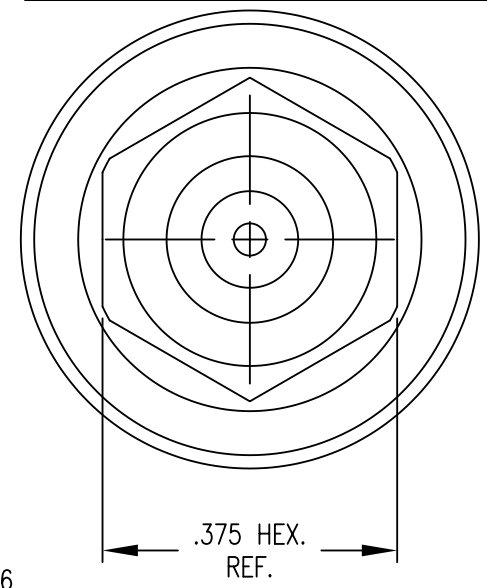


- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-4GHz
- 1.2 VSWR < 1.3
- 1.3 VOLTAGE RATING: 500V RMS (sea level)
- 1.4 NOMINAL IMPEDANCE: 50 OHMS
- 1.5 DWV: 1500 V RMS @ 60 Hz (sea level)
- 1.6 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: PTFE

- 2.2 CONTACT: BRASS
- 2.3 GASKETS: Si RUBBER
- 2.4 SPRING WASHERS: BeCu
- 2.5 OTHER METAL PARTS: BRASS
- 3.0 FINISH: SEE TABLE
- 3.1 SPECIAL CUSTOMER REQUEST
FOR UG-88C/U-KS
BLACK CHROME BODY NOT ENDORSED
SUGGEST USE OF BLACK SILVER

- 4.0 MECHANICAL
- 4.1 INTERFACES MATE WITH MIL-STD-348
- 4.2 ASSEMBLY INSTRUCTIONS: TORQUE 21IN*LBS
- A-01: UG-88/U
- B-01: UG-88C/U, UG-88E/U
- C: UG-88F/U

DWG NO. OL-88-1	REV. D	
PART NUMBER	BODY	CONTACT
UG-88/U	Ni	Ag
UG-88/U NI/GOLD	Ni	Au
UG-88/U SI	Ag	Ag
UG-88C/U	Ni	Ag
UG-88C/U NI/GOLD	Ni	Au
UG-88C/U SI	Ag	Ag
UG-88C/U SI/GOLD	Ag	Au
UG-88E/U	Ni	Ag
UG-88E/U NI/GOLD	Ni	Au
UG-88E/U SI	Ag	Ag
UG-88E/U SI/GOLD	Ag	Au
UG-88F/U	Ni	Ag

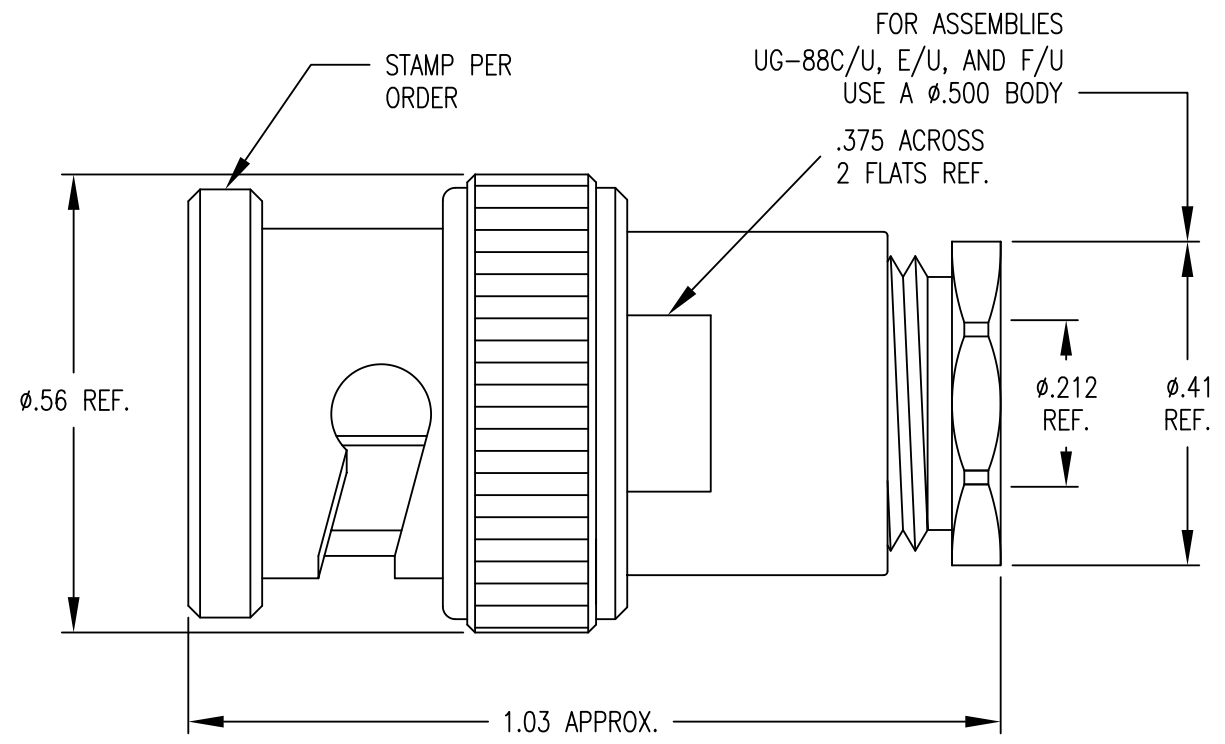

RE49F246

D	ADD SPECIAL REQUEST -KS	5-20-11	FSH	FSH
C	ADD VSWR < 1.3	5-14-09	FSH	FSH
B	ADD PLATING TABLE	2/26/07	FSH	FSH
A	ORIGINAL	12/7/01	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Rev.	Revisions	Date	Dwn.	Appd.
	RECOM. STOCK SIZE	FT/M PCS	QTY REQD	


PROPRIETARY
THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION
PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE
REPRODUCED OR DISCLOSED TO OTHERS OR USED IN
ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS
AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.

REMOVE ALL BURRS AND SHARP
EDGES .005 MAX.
UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN INCHES
AND APPLY AFTER PLATING

UNSPECIFIED TOL.
DEC. ± .005
FRAC. ± 1/64
ANG. ± 1/2°

DWN JMB 6/12/00
CHKD SJS 12/7/00
APPR JO 12/7/01

CONCENTRICITY .004 TIR
ALL MACHINED SURFACES ✓


SAN • TRON, INC.
 4 NEWBURYPORT TPK, IPSWICH, MA 01938

TITLE TYPE BNC PLUG, STRAIGHT,
CLAMP TYPE FOR RG 55, 58/U

MATERIAL: SEE NOTE 2.0 FINISH: SEE NOTE 3.0

FSCM NO. 50896 DWG NO. OL-88-1 REV. D

SCALE 4:1