


**NOTICE OF PROPRIETARY RIGHTS** THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

SYM	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	D. J. H.	12/3/10	J. D. B.	12/6/10

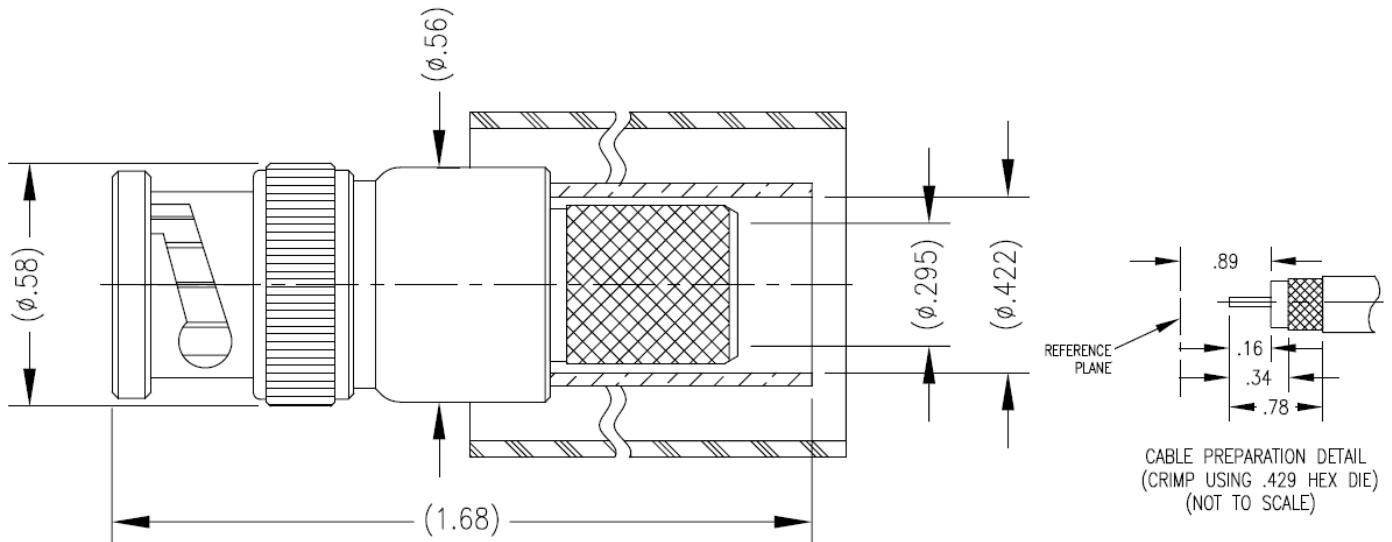

- 1.0 PERFORMANCE (sea level)
- 1.1 FREQUENCY RANGE: 4 GHz
- 1.2 VOLTAGE RATING: 500Vrms
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 1500 Vrms
- 1.5 TEMPERATURE RANGE: -65/+165C

- 2.0 MATERIALS
- 2.1 DIELECTRIC: PTFE
- 2.2 CONTACT: BeCu
- 2.3 CRIMP FERRULE: COPPER
- 2.4 SPRING WASHERS: BeCu
- 2.5 OTHER METAL PARTS: BRASS
- 2.6 GASKET: SILICONE RUBBER

- 3.0 MECHANICAL
- 3.1 INTERFACE PER MIL-STD-348

BODY	CONTACT
ALBALOY	GOLD/Ni

MATL:	UNLESS OTHERWISE SPECIFIED		DFTM. D. J. H.	TIMES MICROWAVE SYSTEMS
	ALL DIMENSIONS ARE IN INCHES MACHINED SURFACES FINISH 63 RMS MAX. REMOVE ALL BURRS .005 MAX. BREAK MACHINE CORNERS .005 MAX. FILLET R. TOLERANCES ON DECIMALS . XX ± .01 . XXX ± .005 ANGLES ± 1° FRACTIONS ± 1/64		DATE 12/3/10	
USED ON: 1			CHKD. J. D. B.	<b>EZ-400-BM</b> BNC MALE FOR LMR-400 CABLE
			DATE 12/6/10	
SCALE: NONE	DWG. SIZE A	DO NOT SCALE DRAWING	APPD. J. D. B.	SHEET 1 of 1
			DATE 12/6/10	
		CODE IDENT 68999	DATE 12/6/10	REV. A