
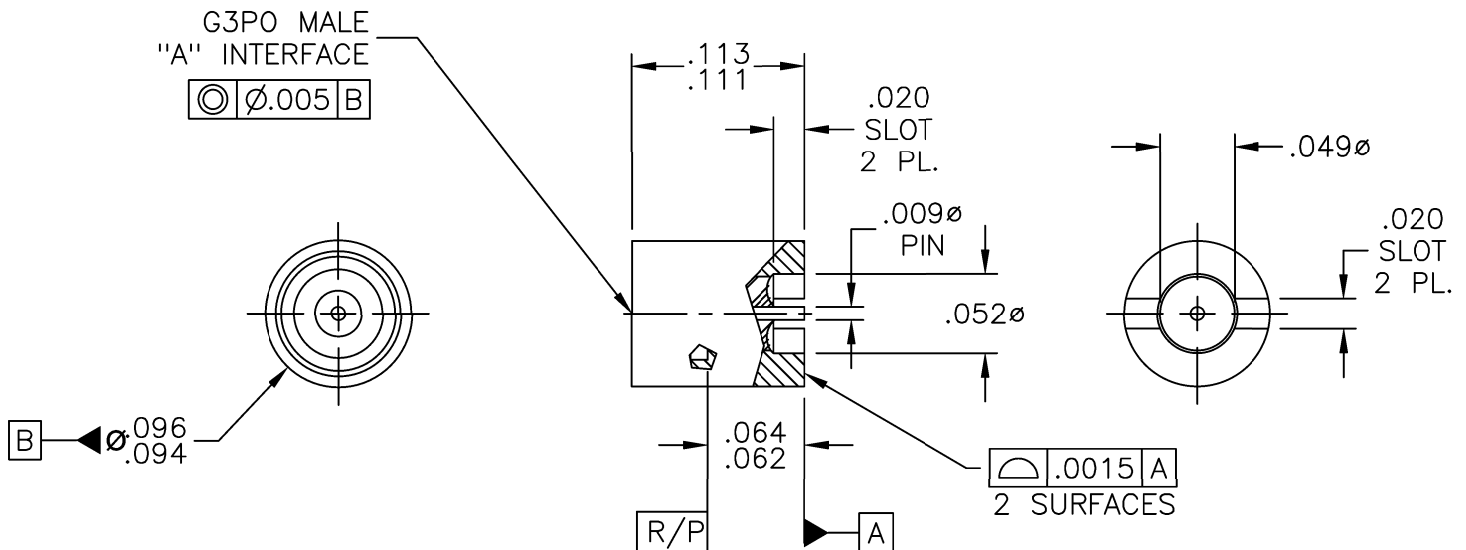


CATALOG NUMBER	"A" INTERFACE
R007-T43-02	FULL DETENT
R007-T45-02	SMOOTH BORE

MATERIAL AND FINISH

HOUSING AND CENTER CONTACT: IRON-NICKEL-COBALT SEALING ALLOY (KOVAR) PER ASTM F 15; HYBRID GOLD 50 MICROINCHES MINIMUM OVER ELECTROLESS NICKEL 50 MICROINCHES MINIMUM.

DIELECTRIC: CORNING 7070 GLASS OR EQUIV.



CORNING RESTRICTED - This drawing and any data contained herein is the proprietary and confidential information of Corning. Neither receipt nor possession of this drawing provides any right to duplicate, use, or disclose any information contained herein except with the express written consent of Corning. EXPORT CONTROL - This document contains information within the purview of the Export Administration Regulations (EAR), 15 CFR 730-774, and may be export controlled.

G3PO MALE  
SMT BLOCK  
(TAB DETENT)

IDENT CODE:  
82316  
REVISION: 01

**Corning Gilbert Inc.**

SOURCE FILE: SK-5191

DWG. NO.: OL-R007-T4X-02

ASSY. PROC.: -