


SSMA Series



SSMA

SSMA Interface Mating Dimensions (Per MIL-STD-348)

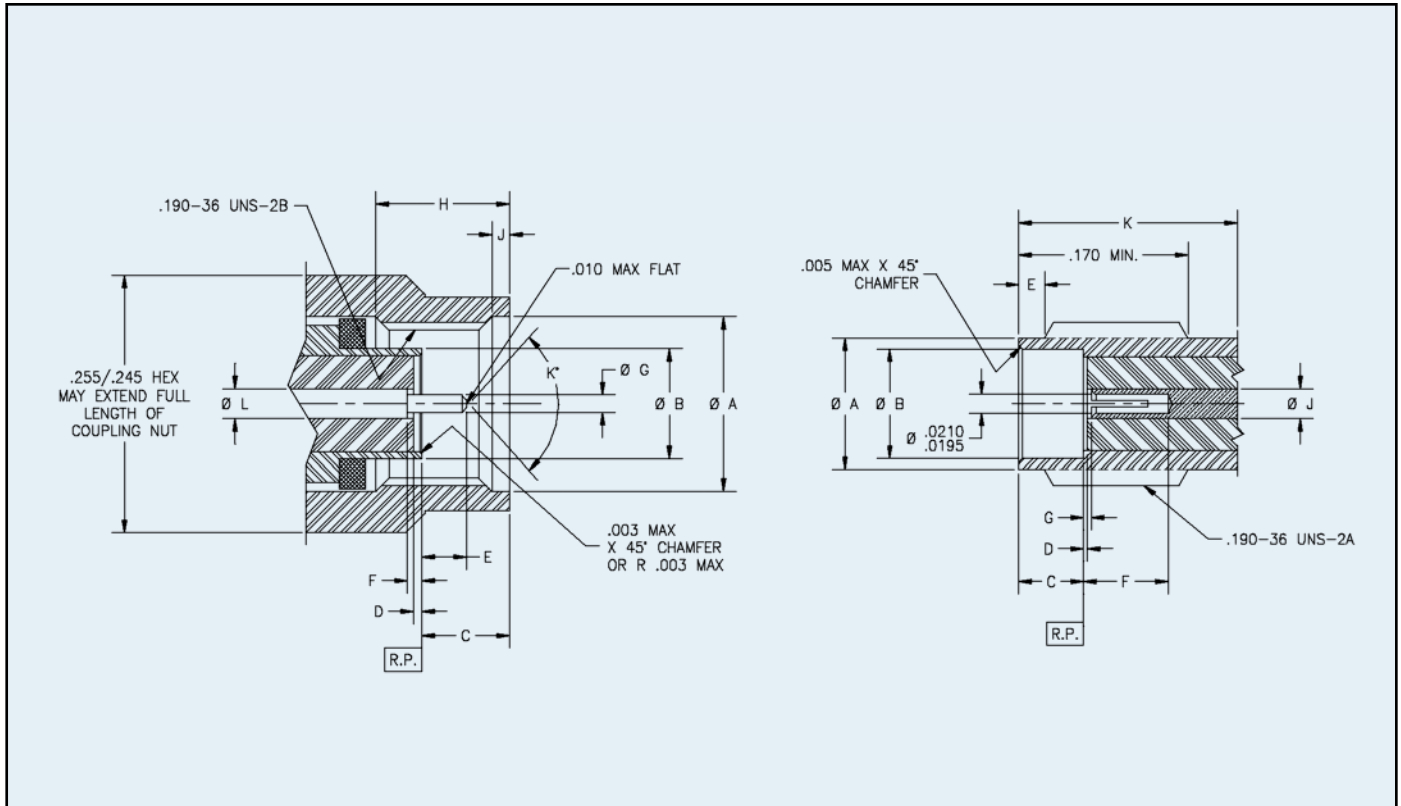

MALE

LTR	Minimum		Maximum	
	in	mm ²	in	mm ²
∅ A	.196	4.98	.202	5.13
∅ B	.1240	3.15	.1268	4.27
C	.100	2.54	.133	3.38
D	.000	0.00	.010	0.25
E	.050	1.27	.065	1.65
F	0.00	0.00	.010	0.25
∅ G	.0195	0.05	.0208	0.53
H	.130	3.30	----	----
J	.015	0.28	.045	1.14
K°	70°	70°	90°	90°
L	.0335	0.85	.0348	0.88

FEMALE

LTR	Minimum		Maximum	
	in	mm ²	in	mm ²
∅ A	.147	3.73	.150	3.81
∅ B	.127	3.23	.130	3.30
C	.075	1.91	.077	1.96
∅ D	.000	0.00	.010	0.25
E	.020	0.51	.040	1.02
F	.075	1.91	----	----
G	.000	0.00	.010	0.25
∅ J	.0335	0.85	.0348	0.88
K	.230	5.84	----	----

Note(s):

- Dimensions are in inches.
- Metric equivalents (to the nearest 0.01mm) are given for general information only and are based on 1 inch = 25.4 millimeters.

SSMA Specifications

The specifications below are general specifications for all SSMA connectors. Specific specifications for VSWR, insertion loss, and RF leakage for each connector is available from the factory upon request. Specifications in the following table are recommended for any procurement documents or drawings.


In the event of any conflict between these specifications and General Specification MIL-PRF-39012 and MIL-PRF-83517, these specifications shall govern. These specifications are subject to change according to the latest revision of General Specification MIL-PRF-39012 and MIL-PRF-83517.

Requirement	Specifications
General	
Material	Steel corrosion resistant per ASTM A-582, 300 Series, AMS 5567, AMS 5370 Brass Alloy per ASTM B-16 Beryllium copper per ASTM B-196 or B-197 PTFE Fluorocarbon per ASTM D-1457 or D-1710 Silicone Rubber per ZZ-R-765, CLASS IIB. 50-60 Shore.
Finish	Center contacts shall be gold plated to a minimum thickness of .00005-inch in accordance with ASTM B-488, Type 3, Code C over nickel underplate. All other metal parts shall be finished so as to provide a connector which meets the corrosion requirements of this table.
Design	The design shall be such that the outline dimensions in this catalog are met. In addition, the assembled connector shall meet the interface dimensions. Dimensions are reference only unless stated.
Electrical	
Insulation Resistance	The insulation resistance shall not be less than 10,000 megohms.
Dielectric Withstanding Voltage	Refer to applicable military slash sheet or consult factory.
RF High Potential Withstanding Voltage	Refer to applicable military slash sheet or consult factory.
Contact Resistance	Refer to applicable military slash sheet or consult factory.
Voltage Standing Wave Ratio (VSWR)	Refer to applicable military slash sheet or consult factory.
RF Leakage	Refer to applicable military slash sheet or consult factory.
Insertion Loss	Refer to applicable military slash sheet or consult factory.
Corona Level	Refer to applicable military slash sheet or consult factory.
Mechanical	
Force to Engage and Disengage	The torque required to engage and disengage shall not exceed 2 inch-pounds. The longitudinal force is not applicable.
Coupling Nut Retention Force	60 lbs. minimum. Applicable to male connectors only.
Coupling Proof Torque	15 in.-lbs. minimum. Applicable to male connectors only.
Cable Retention Force	Refer to applicable military slash sheet or consult factory.
Mating Characteristics	See interface dimensions shown. Applicable to females only: oversize pin .0213 +.0001/-.0000 diameter .030/.045 deep; Insertion force 3 lbs. maximum with .0208 +.0001/-.0000 diameter pin; withdrawal force 1 oz. minimum with .0195 maximum diameter pin.
Connector Durability	The connector to be tested and its mating connector shall be subjected to 500 insertion and withdrawal cycles at 12 cycles per minute max. The connector shall show no evidence of mechanical failure and the connector shall meet the mating characteristic requirements.
Recommended Mating Torque	5 inch-pounds.
Environmental	
Vibration	Specification MIL-STD-202, Method 204, Test Condition D.
Shock	Specification MIL-STD-202, Method 213, Test Condition I.
Thermal Shock	Refer to applicable military slash sheet or consult factory.
Corrosion (Salt Spray)	Specification MIL-STD-202, Method 101, Test Condition B.
Moisture Resistance	Specification MIL-STD-202, Method 106. No measurement at high humidity. Insulation resistance shall be 200 megohms min. within 5 minutes after removal from humidity.

SSMA Adapters

3053


SSMA male to male
R/A adapter

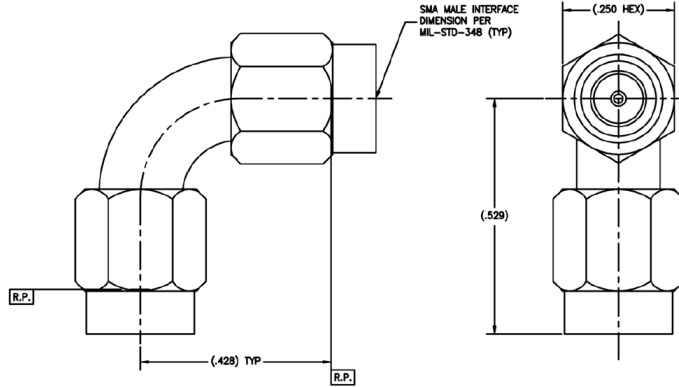

Add suffix CC to Part No. for captivated contact.

3052

SSMA female to
female R/A adapter

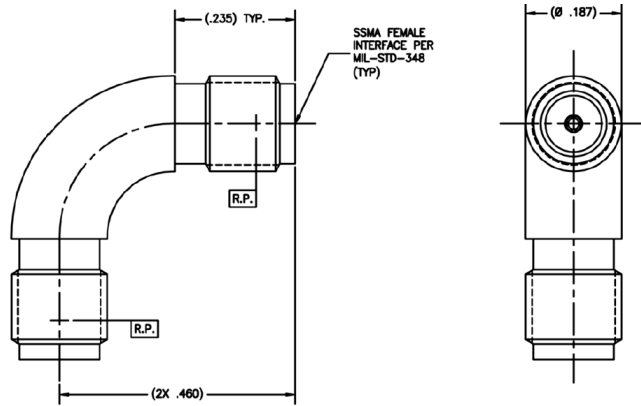


Add suffix CC to Part No. for captivated contact.

SSMA Cable Connectors

3001

SSMA male to
Semi-Rigid cable
(w/o contact)

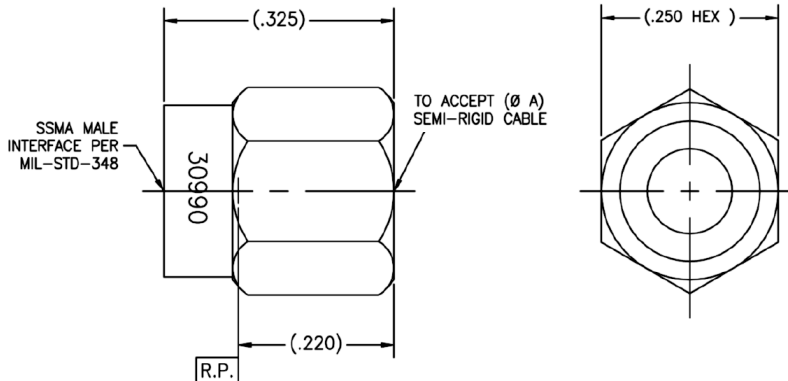


Tensolite Part No.	(Ø A)
-1	.085
-1SF	.085

Standard units are gold finish
SF designates passivated finish

3002

SSMA male to
Semi-Rigid cable
(w/contact)

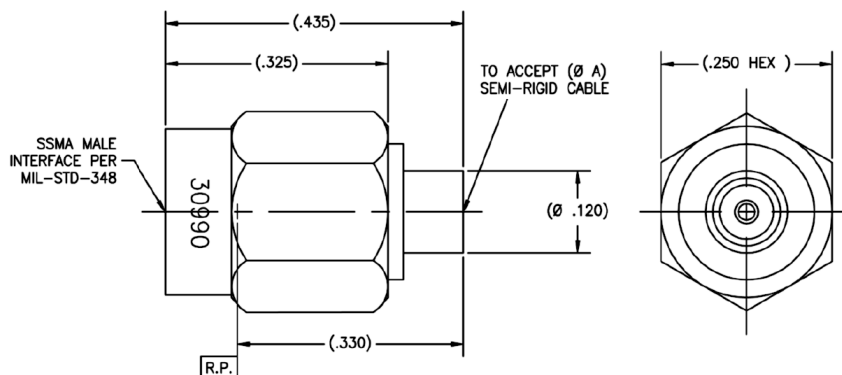


Tensolite Part No.	(Ø A)
-1	.085
-1SF	.085

Standard units are gold finish
SF designates passivated finish

SSMA Cable Connectors


3035CC

SSMA female right angle PCB mount, center contact is captivated

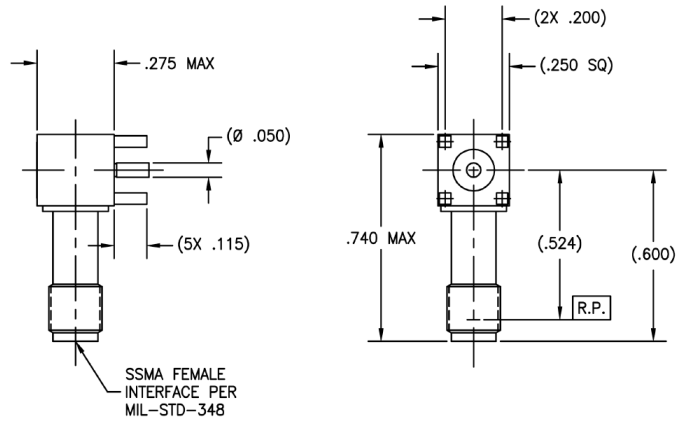

3065CC


SSMA male right angle to $\varnothing .085$ Semi-Rigid cable center contact is captivated

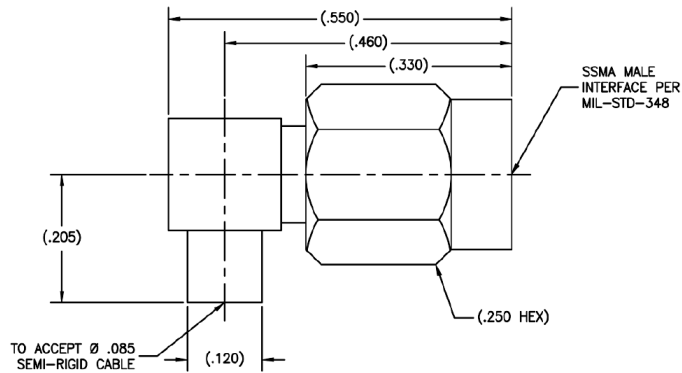

SSMA Bulkhead and Panel Mount

3005


SSMA female 4 hole flange mount

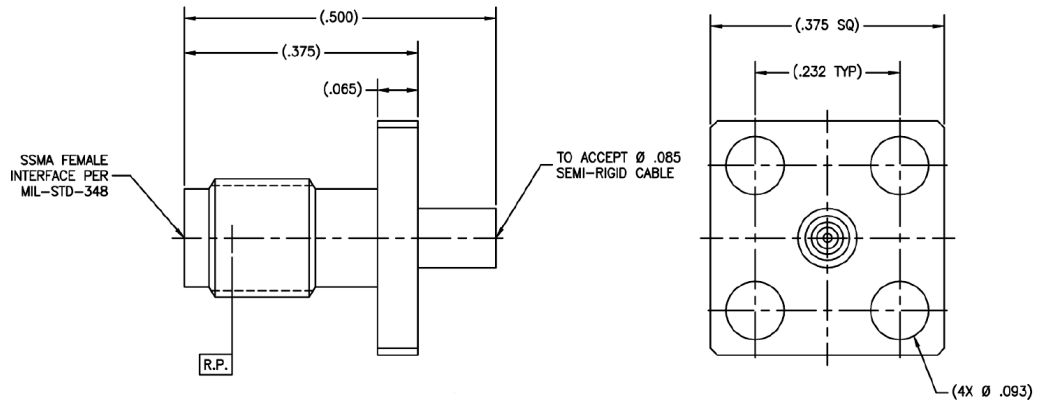

Add suffix CC to Part No. for captivated contact.

3004CC

SSMA female bulkhead mount to $\varnothing .085$ S/R cable

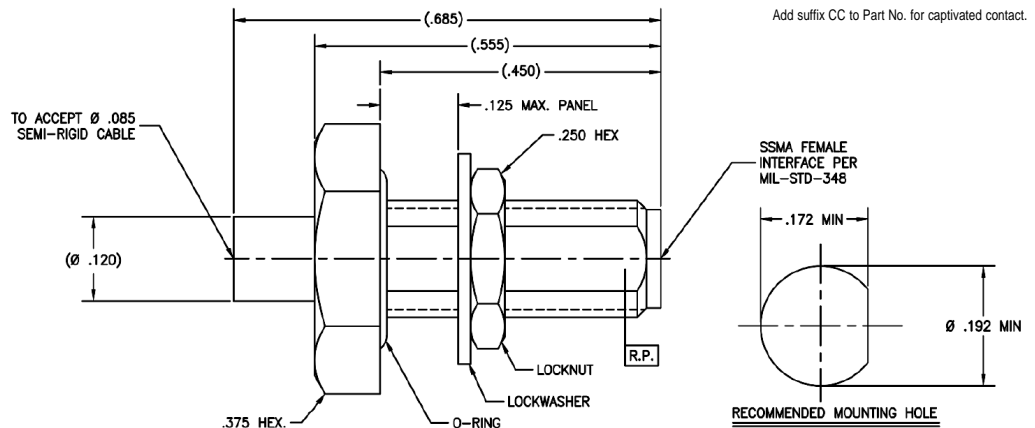

Add suffix CC to Part No. for captivated contact.

SSMA Cable Connectors,
Bulkhead & Panel Mount

