


F3300-0085/F	F Plug Solder	75Ω
--------------	---------------	-----

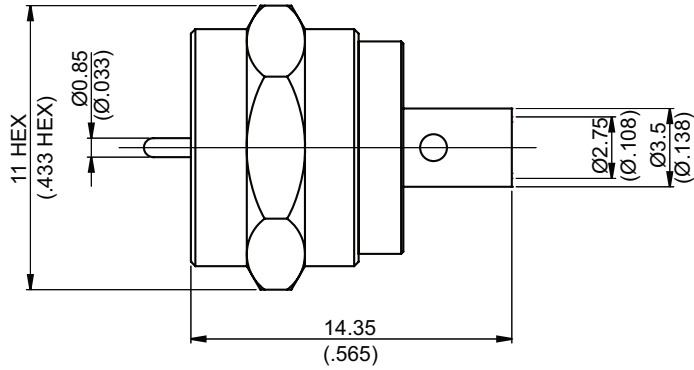

Parts	Material	Plating (Micro-inch)
Contact Pin	Brass	Gold 3 over Nickel 50 over Copper 50
Retainer Ring	Brass	Nickel 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Nickel 100 Over Copper 50
Coupling Nut	Brass	Nickel 100 Over Copper 50

Weight:
Suitable Cables: 75Ω .085 Semi-rigid


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.


CABLE ASSEMBLY INSTRUCTION

F3300-0085/F

JYE BAO CO., LTD.



BODY



CONTACT PIN

DIAGRAM	ASSEMBLY INSTRUCTION
	<p>Step 1: STRIP AS SHOWN .</p>
	<p>Step 2: PUT 0.25 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND CRIMP IN " Y " .</p>
	<p>Step 3: INSERT PREPARED CABLE INTO CONNECTOR BODY " A " AND USE SOLDERING FIXTURE " ST-008 " , INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X " .</p>

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.