



DATE REVISED: 11/17/08

CATALOG NUMBER
H118-R32-01

MATERIAL AND FINISH
FLANGE AND PLUG HOUSING: CRES 303; PASSIVATED
CENTER CONTACT AND HOUSING: BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.
SPRING: 17-7 PH STAINLESS STEEL
DIELECTRICS: VIRGIN PTFE

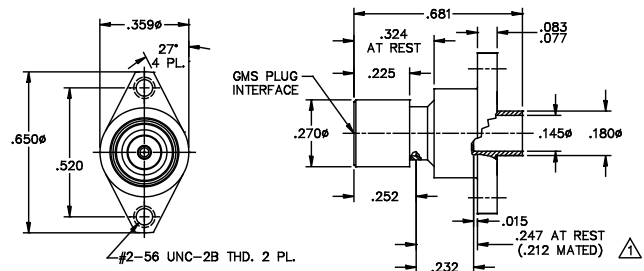

NOTES:
 1. THE .212 RECOMMENDED MATED DIMENSION ALLOWS .035 AXIAL FLOAT IN BOTH DIRECTIONS.
 2. RADIAL FLOAT: .020 MIN.
 AXIAL FLOAT: .070 MIN.

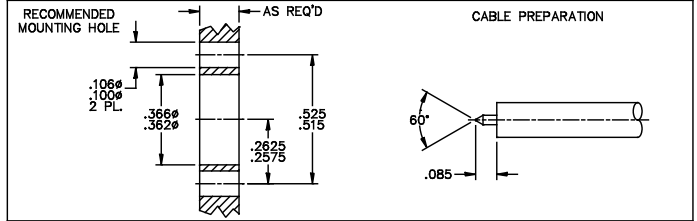

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GMS PLUG 2 HOLE FLANGE FLOAT MOUNT ACCEPTS .141 S/R CABLE		IDENT CODE: 82316	Corning Gilbert Inc.
		REVISION: B1	
SOURCE FILE: SK-2786	DWG. NO.: OL-H118-R32-01	ASSY. PROC.: AP18-002	