



CATALOG NUMBER	"A" INTERFACE	"L"
0119-246-1-SB-"L"	SMOOTH BORE	.055
0119-246-1-LD-"L"	LIMITED DETENT	.100
0119-246-1-FD-"L"	FULL DETENT	

MATERIAL AND FINISH

HOUSING: CRES 303; PASSIVATED
 R/A CONTACT AND BUSHING: BeCu; GOLD PLATE 50-100 MICRONS OVER NICKEL PLATE 50 MICRONS MIN.
 DIELECTRIC: VIRGIN PTFE (TEFLON)

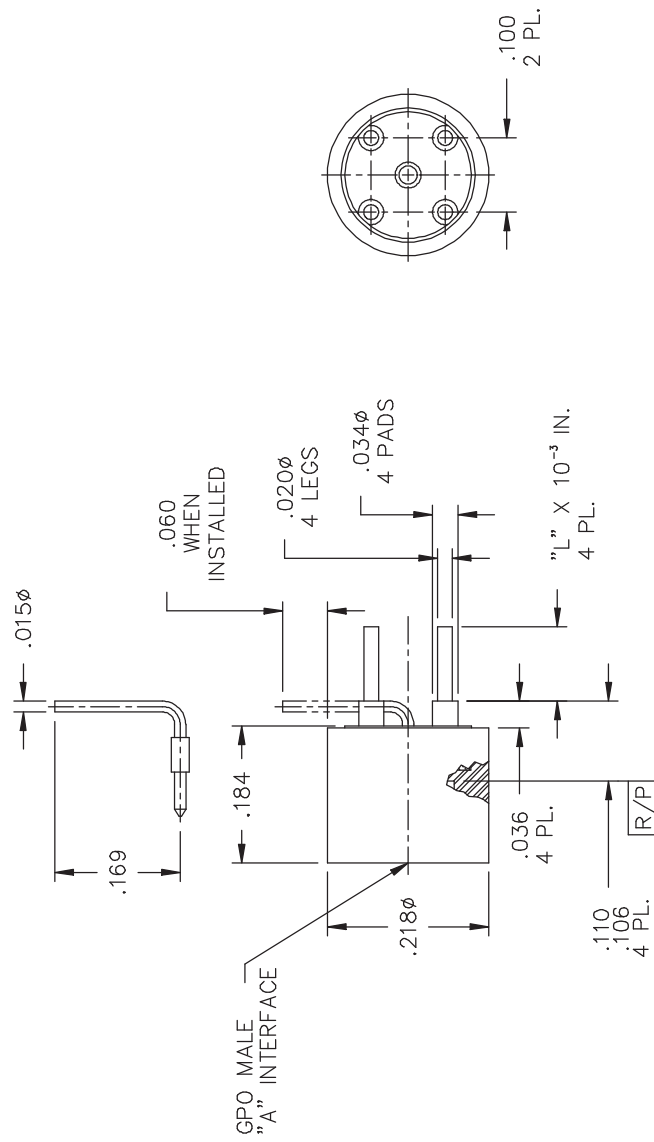

RECOMMENDED MOUNTING HOLES AND PATTERN

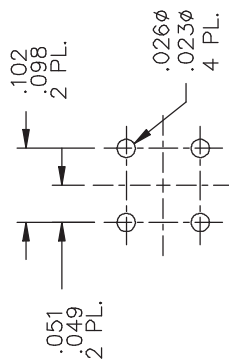

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPO MALE STRAIGHT TO P.C.B. MOUNT WITH SEPARATE R/A PIN (TAB DETENT)	IDENT CODE: 82316	Corning Gilbert Inc.
	REVISION: A1	
SOURCE FILE: SK-1737	DWG. NO.: OL-0119-246-1-TAB	ASSY. PROC.: -