

## MATERIAL AND FINISH

HOUSING AND  
BUSHING:


CRES 303 PER ASTM A 484  
AND ASTM A 582 OR ASTM A 555  
AND ASTM A 581. PASSIVATE PER  
MIL-F-14072 E300.

CENTER CONTACT:

BERYLLIUM COPPER PER ASTM  
B 196 AND/OR ASTM B 197.  
GOLD PLATE PER MIL-G-45204;  
TYPE 1, GRADE C, CLASS 1.  
OVER NICKEL PER QQ-N-290A;  
CLASS 1; 50 MICROINCHES MIN.

DIELECTRIC:

VIRGIN PTFE FLUOROCARBON PER  
ASTM D 1710 AND ASTM D 1457.

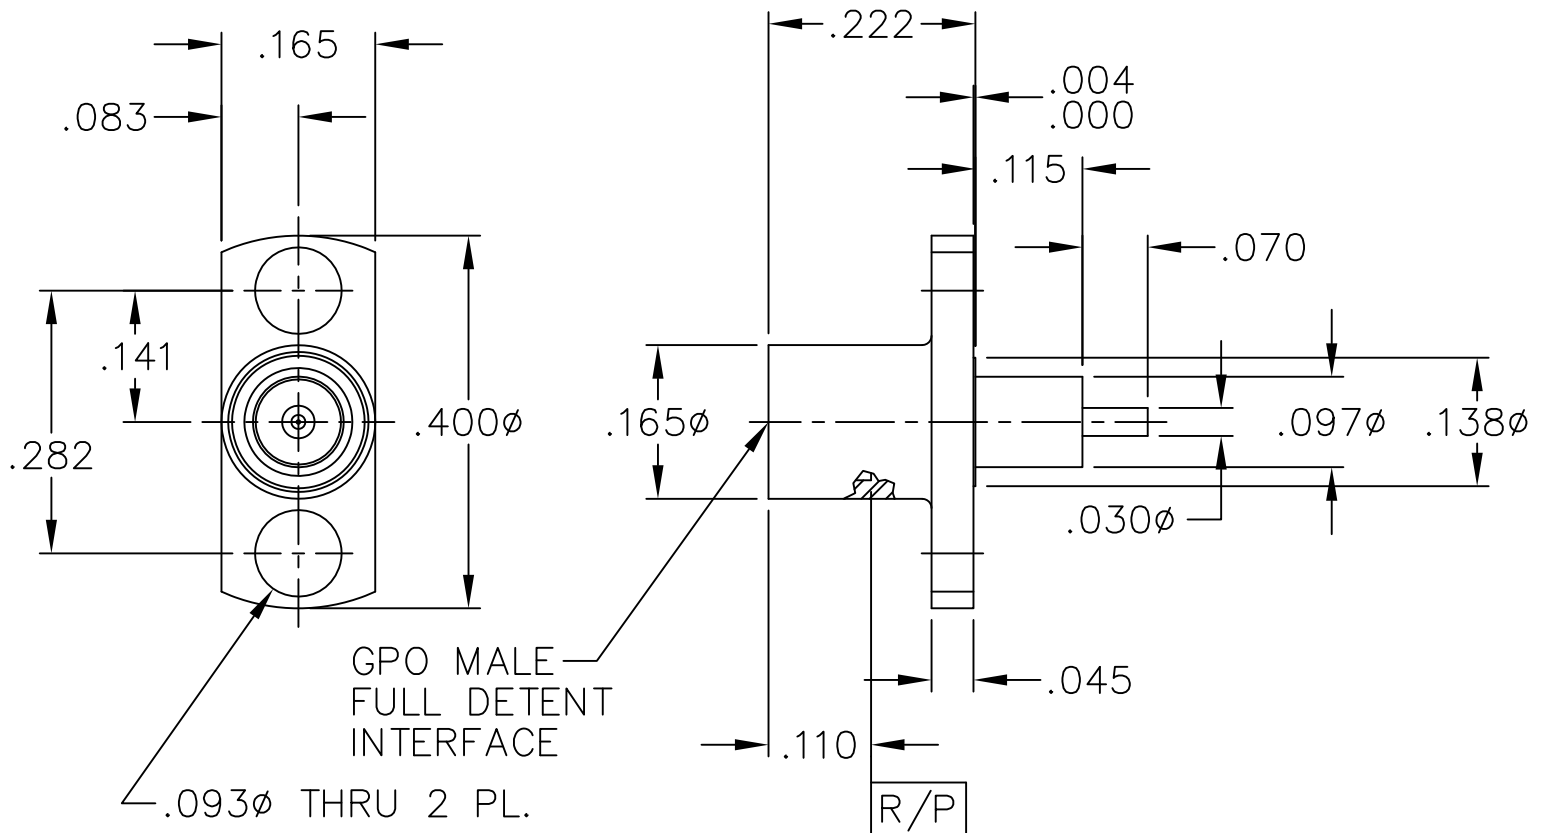

This drawing and any data contained therein is the property of Gilbert Engineering Co., Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co. Inc.

ALL DIMENSIONS IN INCHES

CAT. NO. 0119-789-3

CODE IDENT NO.  
82316

GILBERT ENGINEERING CO., INC.

DRAWN BY: C. LONG

DATE: 11/4/93

TITLE: OUTLINE DRAWING FOR GPO  
MALE FULL DETENT 2 HOLE  
FLANGE MOUNT STRAIGHT TERMINAL

ASSEMBLY PROCEDURES: NONE

SOURCE FILE: MECR# 862

SHT. 1 OF 1

DWG. NO. SS-7056-3

REV  
F