




|                |                |
|----------------|----------------|
| CATALOG NUMBER | "A" INTERFACE  |
| B012-L13-11-T  | FULL DETENT    |
| B012-L14-11-T  | LIMITED DETENT |
| B012-L15-11-T  | SMOOTH BORE    |

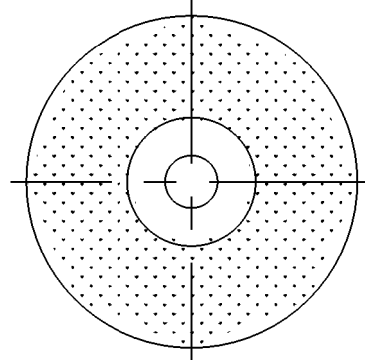

MATERIAL AND FINISH

CENTER CONTACT AND SHROUD: BeCu; GOLD PLATE 75 MICROINCHES TYPICAL  
 OVER NICKEL PLATE 100 MICROINCHES TYPICAL  
 ALIGNMENT PLUG: VIRGIN PTFE  
 SOLDER: SN63

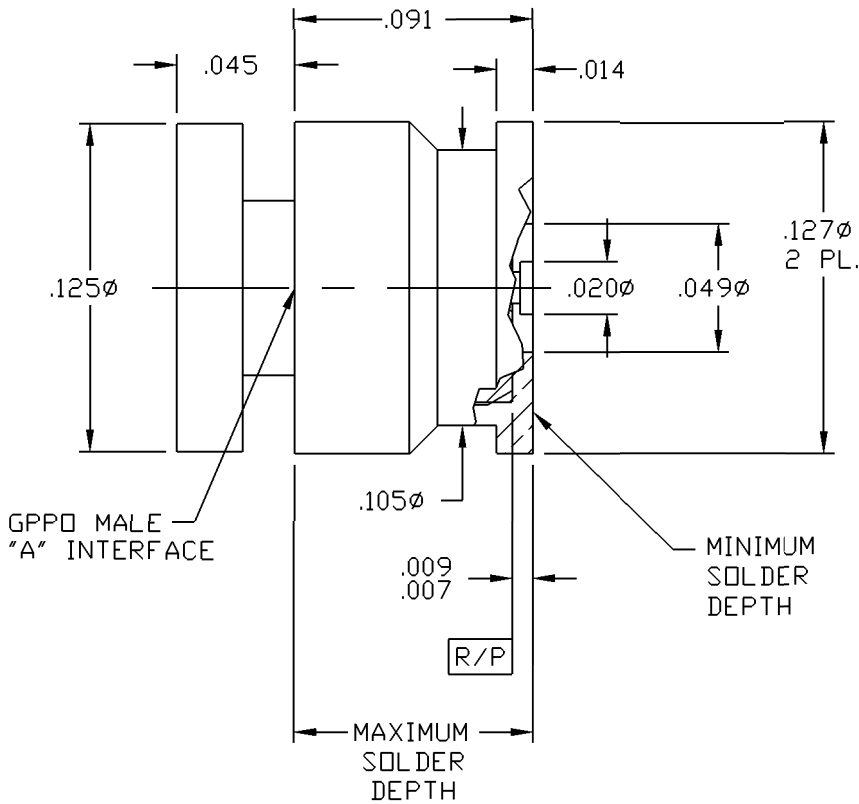

NOTES:  
 1. ALL DIMENSIONS SHOWN BEFORE SOLDER DIP.

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

|  |                            |                             |
|--|----------------------------|-----------------------------|
| GPPD MALE<br>PCB SURFACE MOUNT<br>SOLDER DIPPED (TAB DETENT) | IDENT CODE:<br>82316       | <b>Corning Gilbert Inc.</b> |
|  | REVISION: 01               |                             |
| SOURCE FILE: SK-4817   | DWG. NO.: 01-B012-L1X-11-T | ASSY. PROC.: -              |