



CATALOG NUMBER	"A" INTERFACE
B003-L33-03	FULL DETENT
B003-L35-03	SMOOTH BORE

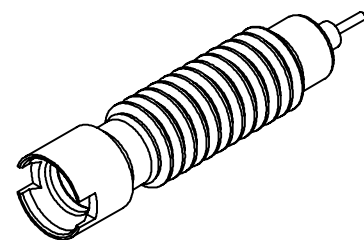

MATERIAL AND FINISH

HOUSING AND BUSHING: CRES 303; PASSIVATED
 PIN AND CONTACT: BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.
 DIELECTRICS: VIRGIN PTFE

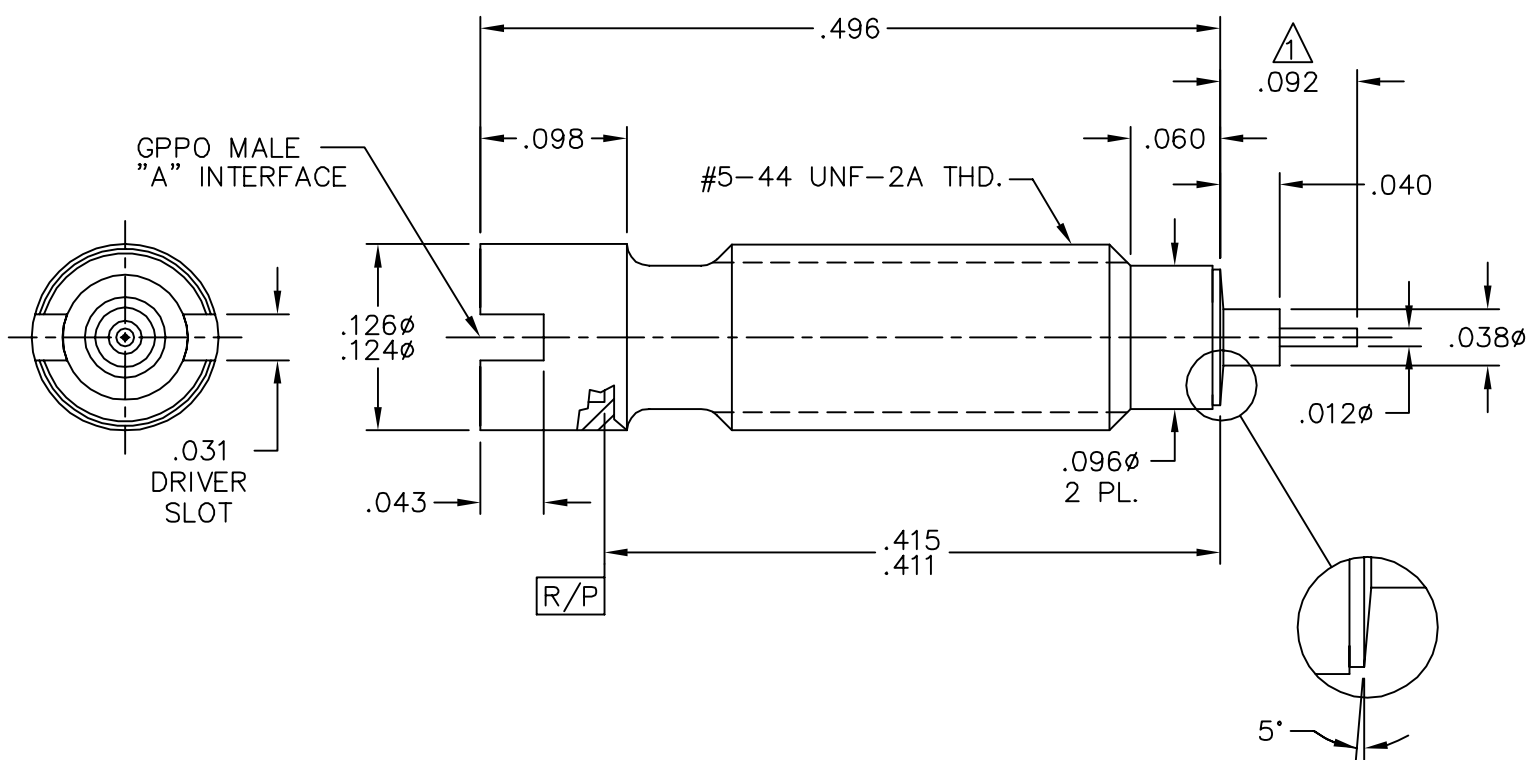

NOTES:

1. SOME MOVEMENT OF SLIDING PIN MAY OCCUR DURING SHIPMENT. ADJUST TO DIMENSION SHOWN IF REQUIRED.

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPPO MALE THREAD-IN
(TAB DETENT)

IDENT CODE:

82316

REVISION: J

Corning Gilbert Inc.

SOURCE FILE: SK-1948

DWG. NO.: OL-B003-L3X-03

ASSY. PROC.: -