


CAD DRAWING - NO MANUAL REVISIONS

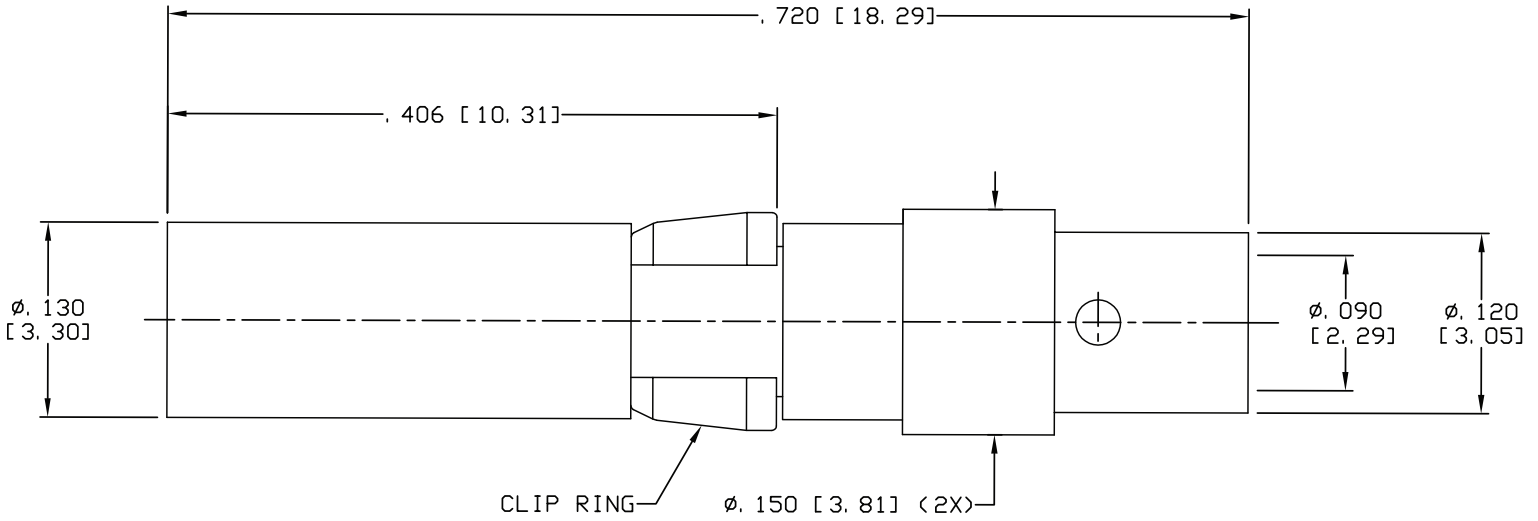

Notes:

56-1202-0860B

- 1) Design and Interface per IDS 56A.
- 2) High Performance Blindmate RF/Microwave Contact for High Density Multiport RF Connectors.
- 3) Size 12 PkZ®, 50 Ohm, 40 GHz Straight Receptacle.
- 4) Direct Solder to RG-405 Cable (M17/133) .086 S.R.
- 5) Contact and Spacer Supplied Loose.
- 6) .000030" Min. Gold Over Nickel.

E	PER ECN 11843	01/24/14	JEM	<b>PALCO CONNECTOR</b> 22 GREAT HILL RD., NAUGATUCK, CT 06770 UNLESS OTHERWISE SPECIFIED, PALCO WORKMANSHIP STANDARDS APPLY TOLERANCES ON: DECIMALS: XX ± .01 .XXX ± .005 ANGLES ±1/2° 32' DIMENSIONS IN INCHES OR (METRIC) DO NOT SCALE PRINTS	DRAWN	CHECKED	ENGINEER	APPROVED	FSCM
D	PER ECN 11798	11/12/13	JEM		JEM	JEM	JEM	JEM	58167
C	PER ECN 11735	07/22/13	JEM		DESCRIPTION SIZE 12 PkZ RECEPTACLE, DIRECT SOLDER	DATE	DRAWING NO.	PLATING OPT.	
B	PER ECN 11651	04/22/13	JEM			10/24/12	56-1202-0860	B	
A	PER ECN 11574	02/19/13	JEM			CATALOG ITEM			
REV.	DESCRIPTION	DATE	APPR.						

THE INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROPRIETARY AND MAY NOT BE USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF PALCO.

CABLE ASSEMBLY PROCEDURE

P/N 56-1202-0860

PAGE 1 OF 1 DATE: 02/19/13



DRAWN: JEM APPROVED: JEM

FOR USE WITH RG-405 CABLE

**PALEO**  
**CONNECTOR**


22 GREAT HILL ROAD, NAUGATUCK, CT. 06770  
PHONE: (203) 729-9090 FAX: (203) 723-1794

REV	DESCRIPTION	DATE	APPR
B	PER ECN 11651	04/22/13	JEM
C	PER ECN 11735	07/22/13	JEM
D	PER ECN 11798	11/12/13	JEM
E	PER ECN 11843	01/24/14	JEM

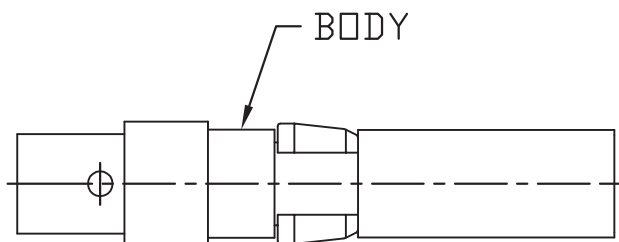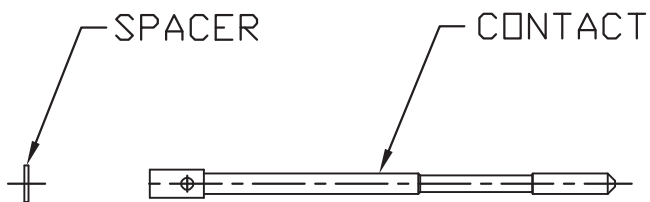


STEP 1

(FOR T-FLEX STYLE CABLES ONLY)  
DIP END OF CABLE INTO FLUX AND THEN TIN DIP CABLE TO DIMENSIONS SHOWN USING KESTER 63/37 SOLDER @ 500°F FOR SIX SECONDS MAX.




STEP 2

TRIM CABLE TO DIMENSIONS SHOWN. TIN CENTER CONDUCTOR. (.210±.010 DIMENSION FOR JACKETED CABLES ONLY) TIN CENTER CONDUCTOR.

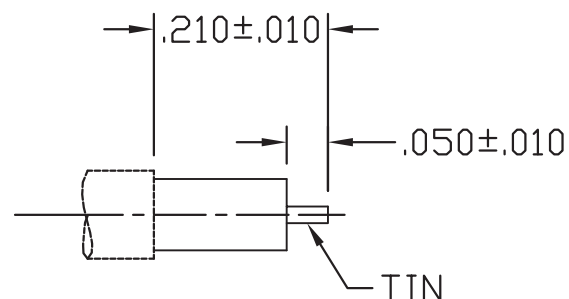


STEP 3

SLIDE CONTACT & SPACER ONTO CENTER CONDUCTOR AS SHOWN. SOLDER CONTACT TO CENTER CONDUCTOR. CLEAN SOLDER JOINT.

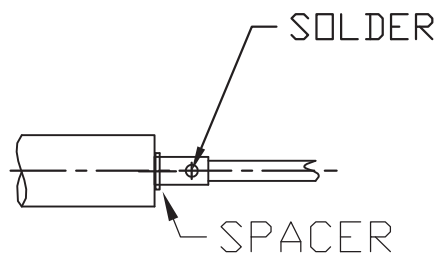

STEP 4

INSERT ABOVE CABLE INTO CONNECTOR BODY UNTIL CABLE BOTTOMS. SOLDER BODY TO CABLE. CLEAN SOLDER JOINT.

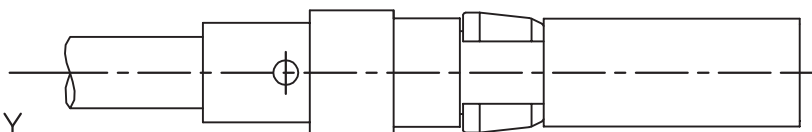

INTERFACE DESIGN STANDARD		 22 GREAT HILL ROAD, NAUGATUCK, CT. 06770 PHONE: (203) 729-9090 FAX: (203) 723-1794	REV	DESCRIPTION	DATE	APPR
IDS-56A			B	PER ECN 5946	10/22/01	HN
PAGE 1 OF 1	DATE: 09/16/97		C	PER ECN 7453	06/01/04	JEM
DRAWN: JEM	APPROVED: HN		D	PER ECN 11477	10/18/12	JEM
		E	PER ECN 11617	03/12/13	JEM	

DESCRIPTION: 56 SERIES PkZ®, SIZE 12 MICROWAVE CONTACTS FOR HIGH DENSITY MULTIPORT RF CONNECTORS

U.S. PATENT No. 4,917,630

JAPANESE PATENT No. 1,769,278

### MECHANICAL

#### MATERIALS

##### BODIES:

PLUG BODIES - BRASS PER ASTM B 16.  
 RECEPTACLE BODIES - BRASS PER ASTM B 16.

INSULATORS - VIRGIN TEFLON (PTFE) PER ASTM D 1710 OR  
 #1 VARY FLEX TYPE HV, TWO-PART EPOXY.

RETAINING RING - BERYLLIUM COPPER PER ASTM B 196.  
 MALE CONTACT - BERYLLIUM COPPER PER ASTM B 196

##### PLATING:

GOLD PER MIL-G-45204.  
 COPPER PER MIL-C-14550.  
 NICKEL PER QQ-N-290.

or BRASS PER ASTM B 16.  
 FEMALE CONTACTS - BERYLLIUM COPPER PER ASTM B 196.

### FINISHES (ADD LETTER TO END OF PART NUMBER)

#### BODIES AND CONTACTS -

"A" - .000050 MIN. GOLD OVER NICKEL.  
 "B" - .000030 MIN. GOLD OVER NICKEL.  
 OTHER METAL PARTS: PLATED TO MEET  
 THE ENVIRONMENTAL REQUIREMENTS.

### MATING CHARACTERISTICS

OUTER BODIES \_\_\_\_\_ 1.5 LBS MAX. INSERTION,  
 2 OZ. MIN. WITHDRAWAL.  
 CENTER CONTACTS \_\_\_\_\_ 14 OZ. MAX. INSERTION,  
 .5 OZ. MIN. WITHDRAWAL.  
 HOUSING RETENTION \_\_\_\_\_ 12 LBS MIN.  
 AXIAL MATING TOLERANCE \_\_\_\_\_ .070

### ELECTRICALS

FREQUENCY RANGE: DC TO 40 GHz.  
 VOLTAGE RATING STRAIGHT: 800 VRMS.  
 VOLTAGE RATING ANGLED: 600 VRMS.  
 CURRENT RATING: 1.5 AMPS.  
 INSULATION RESISTANCE: 2000 MEGOHMS MIN.  
 INSERTION LOSS:  $.06 \sqrt{f(\text{GHz})}$  dB

CONTACT RESISTANCE: CENTER CONTACT 6 MILLIOHMS  
 CONTACT RESISTANCE: OUTER CONTACT 4 MILLIOHMS  
 VSWR: CONFIGURATION DEPENDENT.  
 R.F. LEAKAGE: -90 dB MIN. @ 2-3 GHz.

### ENVIRONMENTAL

OPERATING TEMPERATURE: -65°C to +165°C  
 VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION D.  
 SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION I.  
 SALT SPRAY: MIL-STD-1344, METHOD 1001, CONDITION B.  
 DURABILITY: 500 CYCLES.

THERMAL SHOCK: MIL-STD-202, METHOD 107, TEST  
 CONDITION B, EXCEPT HIGH TEMPERATURE SHALL  
 BE +85°C.  
 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106.  
 INSULATION RESISTANCE: 2000 MEGOHMS  
 AFTER HUMIDITY.