
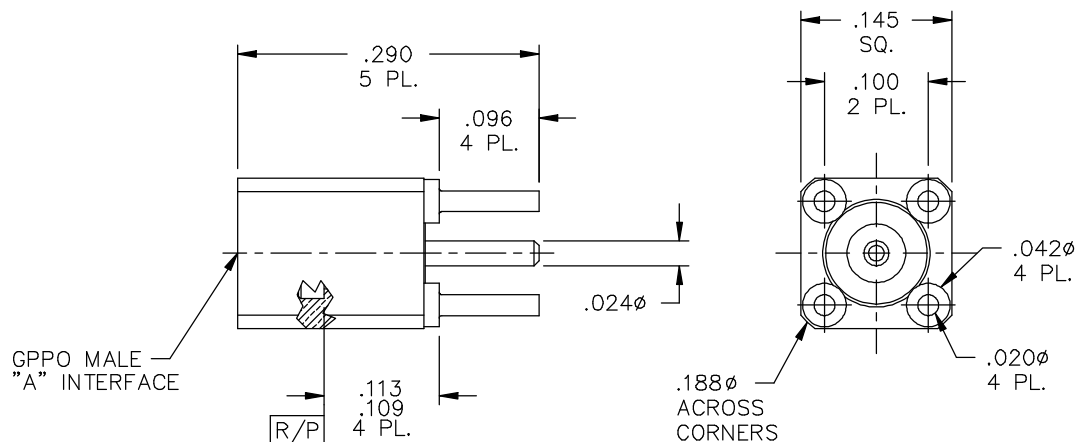



CATALOG NUMBER	"A" INTERFACE
B008-L13-01	FULL DETENT
B008-L15-01	SMOOTH BORE

MATERIAL AND FINISH

BUSHING: CRES 303; PASSIVATED
 CONTACT AND HOUSING: BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.
 DIELECTRICS: VIRGIN PTFE (TEFLON)



MOUNTING HOLES AND PATTERN

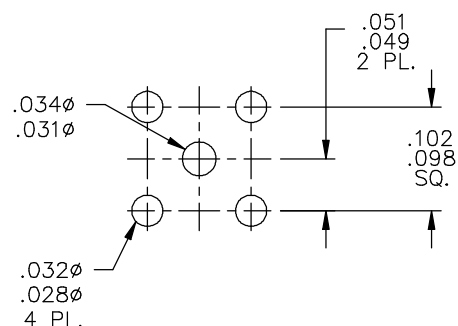

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPPO MALE STRAIGHT
 TO P.C.B. MOUNT
 (TAB DETENT)

IDENT CODE:
 82316

REVISION: C

Corning Gilbert Inc.

SOURCE FILE: MECR# 2332

DWG. NO.:

OL-B008-L1X-01

ASSY. PROC.:

-