


Coaxial Cable Connector 25_N-50-3-9/133_N

Description

Straight panel cable jack, flange mount

Interface standards

IEC 61169-16_MIL-STD-348A/304_CECC 22210

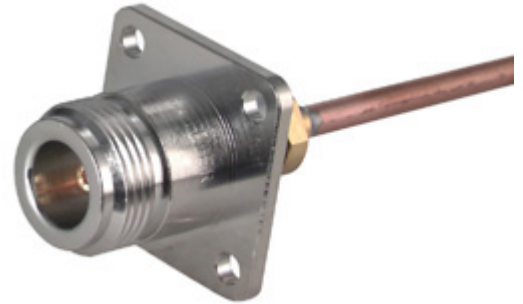

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	11 GHz

Mechanical Data

Centre contact	soldered
Outer contact	soldered
Weight	0.0413 kg

Environmental Data

Operating temperature	-65 °C to 165 °C
2011/65/EU, RoHS	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	

Related Documents

Outline drawing	DOU-00009216
Catalogue drawing	DCA-00009218
Assembly instruction	DOC-0000350737
Mounting hole	DOU-00008795

Ordering Information

Single package	25_N-50-3-9/133_NE
Bulk 100 pcs package	25_N-50-3-9/133_NH

Additional Information

Suitable cables	EZ_141_TP_M17, SUCOFORM_141, MULTIFLEX_141
-----------------	--