


DO NOT SCALE DRAWING

- 1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-6 GHz
 1.2 VOLTAGE RATING: 1000V RMS (sea level)
 1.3 NOMINAL IMPEDANCE: 50 OHMS
 1.4 DWV: 2500V RMS @ 60Hz (sea level)
 1.5 TEMPERATURE RANGE: -65°C TO +165°C
 2.0 MATERIALS
 2.1 DIELECTRIC: PTFE
 2.2 CENTER CONTACT: BeCu

- 2.3 LOCKWASHER: PHOSPHOR BRONZE
 2.4 ALL OTHER METAL PARTS: BRASS
 2.5 GASKET: SILICON RUBBER
 3.0 FINISHES
 3.1 CENTER CONTACT: SEE TABLE
 3.2 ALL OTHER METAL PARTS: SEE TABLE
 4.0 MECHANICAL
 4.1 INTERFACE IN ACCORDANCE WITH MIL-STD-348

DWG NO. OL-0405-21-1		REV. A
PART NUMBER	BODY	CONTACT
0405-21	NICKEL	SILVER


PLATING PER SAN-TRON SPEC. 7.3.1-8

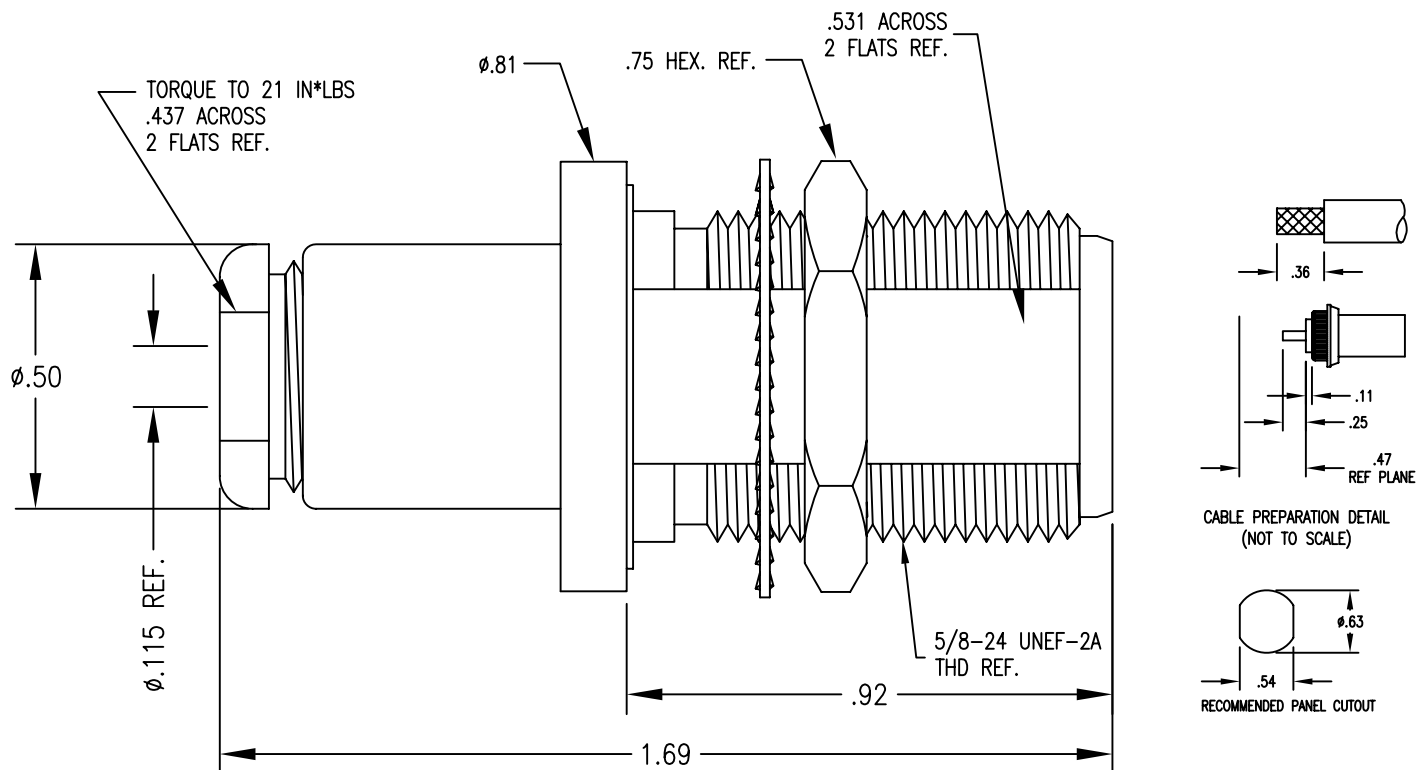

A	OUTLINE RELEASE	NEW	3/18/09				
Rev.	Revisions	Disp.	Date	Dwn.	Appd.		
		Ref.:	REMOVE ALL BURRS AND SHARP EDGES .005 MAX.				
		SK-					

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.

UNLESS OTHERWISE SPECIFIED:
 ALL DIMENSIONS ARE IN INCHES.
 ALL DIMENSIONS ARE AFTER PLATING.
 .XXX = ±.005 ALL MACHINED SURFACES 64/ MAX.
 .XX = ±.01 ANG. ±1/2' FRACTIONAL = ±1/64
 ◎.004 MAX. TIR ⊥ AXIS .001



THIRD ANGLE PROJECTION

DWN	JTH	3/18/09
CHKD	SJS	3/18/09
APPR	JTH	3/18/09



SAN-TRON, INC.

4 NEWBURYPORT TPK. IPSWICH MA USA 01938
 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573
 WWW. santron.com E MAIL: santron@santron.com

TITLE TYPE N, BULKHEAD JACK FOR RG-174, 188, AND 316/U

MATERIAL: SEE NOTES	FINISH: SEE TABLE
CAGE CODE: 50896	DWG NO. OL-0405-21-1
SCALE X:X	REV. A