


***** THIS DRAWING AND ITS CONTENTS ARE THE SOLE PROPERTY OF PRECISION CONNECTOR INC. AND ARE SUBJECT TO CHANGE WITHOUT NOTICE UNLESS OTHERWISE SPECIFIED *****

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE	07/14/09	MJK	MJK

FLANGE REAR SEATING SURFACE TO REF. PLANE = .381 REF.
REF. PLANE TO END OF CABLE CENTER COND. = .355 REF.

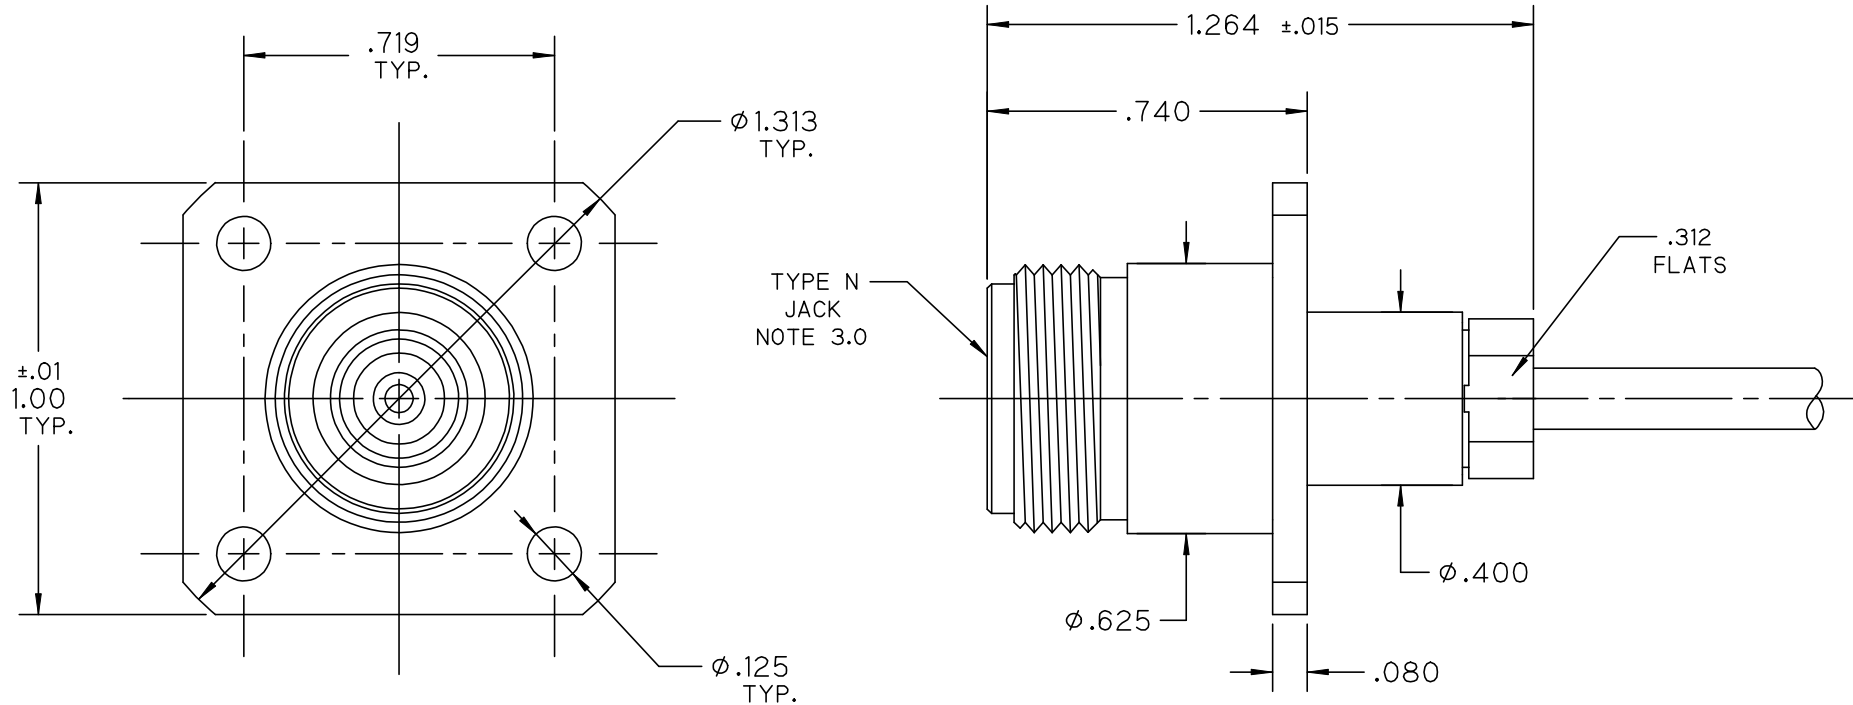

NOTES :

1.0 MATERIALS:

- 1.1 BODY & CLAMP NUT: STEEL, CORROSION RESISTANT PER ASTM-A582, UNS NO. S30300.
- 1.2 CENTER COND.: BERYLLIUM COPPER PER ASTM-B196, UNS C17300.
- 1.3 INSULATOR(S): PTFE FLUOROCARBON PER ASTM-D1710.
- 1.4 DIELECTRIC BEAD: POLYETHERIMIDE THERMOPLASTIC (ULTEM 1000) PER ASTM-D5205.

2.0 FINISHES:

- 2.1 CENTER CONTACT & SOLDER FERRULE: GOLD PLATE PER ASTM-B488, 50 MICROINCHES MIN. THK. OVER ELECTROLYTIC NICKEL PLATE PER ASTM-B689 50 MICROINCHES MIN. THK.
- 2.2 BODY & CLAMP NUT: PASSIVATE PER SAE-AMS-2700.
- 2.3 DIELECTRICS: NONE.
- 3.0 INTERFACE: TYPE N JACK INTERFACE PER PCI INTERFACE SPECIFICATION PCI-PNJ.

NOTE: PANEL THICKNESS ON INTERFACE SIDE OF FLANGE IS .187 MAX.

TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY: MJK	PART DESCRIPTION: TYPE N JACK, 4 HOLE FLANGE, SOLDER CLAMP FOR RG-402 CABLE			
.XX ± .02	DATE: 07/14/09	SCALE	SHEET NO.	DRAWING NUMBER	REV
.XXX ± .005	CAGE CODE	3:1	1 OF 1	3370-0L	A
.XXXX ± .0005	4MJR5				
ANGLES ± 2°					



Precision Connector, Inc.